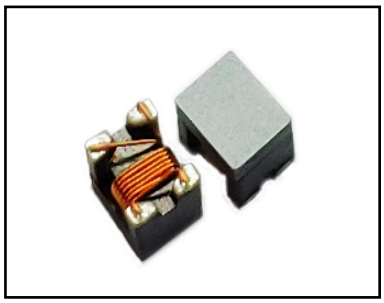


Features

- ◆ The common mode filter is mainly used to reduce radiation and high frequency common mode noise.
- ◆ Reduce asymmetric interference on CAN,power and other interfaces.
- ◆ Small package large current to meet a variety of circuits
- ◆ Low leakage, no effect on differential mode current
- ◆ Operating temperature : -40 to +125℃
- ◆ Packaging quantity:1000pcs

Application

- ◆ Portable devices
- ◆ Digital cameras
- ◆ Player
- ◆ Smart home
- ◆ Robot

Part Numbering

CMF	3225	W	A	102	M	P	T
A	B	C	D	E	F	G	H

A:ASIM common mode filter

B:Dimension

C:Wire wound

D:Shieling

E:Common Mode Impedance (at 100MHz),102=1000Ω

F:Tolerance M±25%


G:Internal series

H:Tape


Specification


Part number	Common mode impedance(Ω) @100MHz	Rated Current (A) max	DC Resistance (Ω) max
CMF3225AW102MPT	1000±25%	2.0	0.06
	Rated volt max(Vdc)	**Withstand volt (Vdc)**	**IR (Ω) min**
	60.0	80.0	10M

Performance Curves

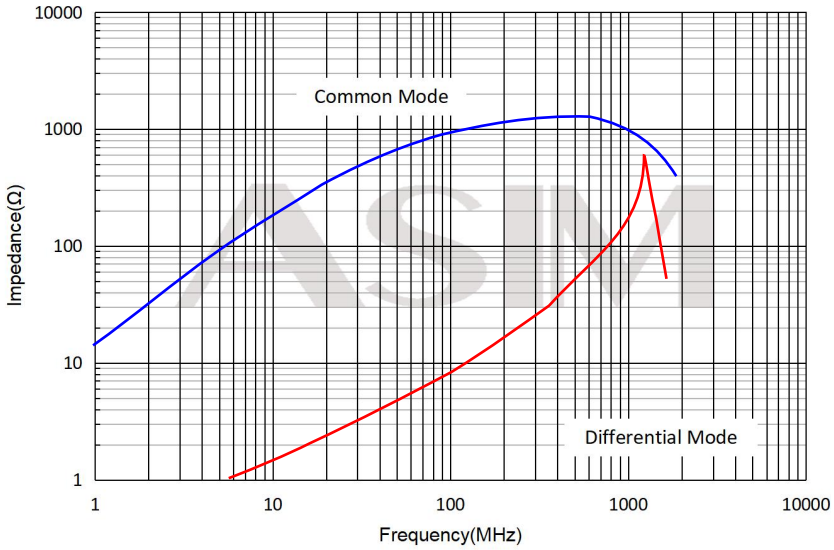

Dimension (mm)

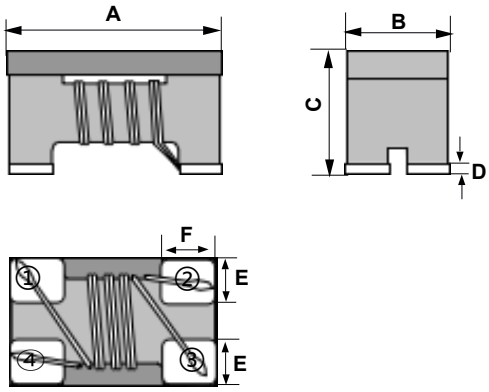




PIN NUMBER	DESCRIPTION
① ~ ②	DATA LINE
④ ~ ③	DATA LINE


Series	A(mm)	B(mm)	C(mm)	D (mm)	E (mm)	F(mm)
3225	3.2±0.2	2.5±0.2	1.9±0.2	0.2 ±0.1	0.8 ±0.1	0.65±0.1

Recommended Land Pattern (mm)

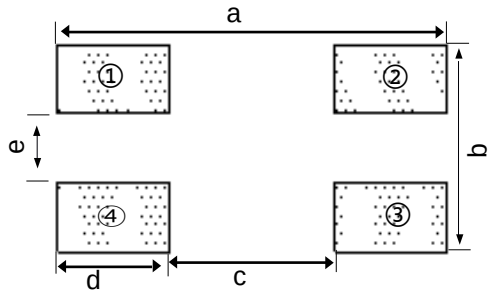


Symbol	a	b	c	d	e
Dimension	3.7	2.55	1.9	0.9	0.75

Recommended Reflow Profile

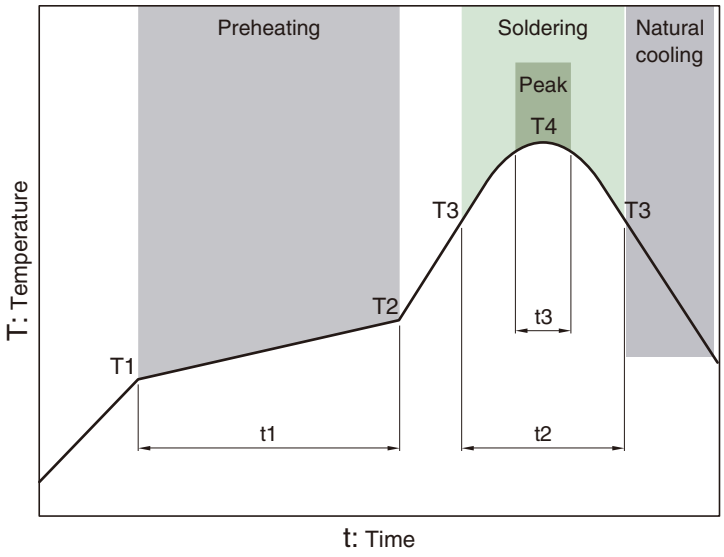


Preheating			Soldering		Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	25 to 35s	250°C	5s

Reel Dimmension&Tape Dimension (mm)

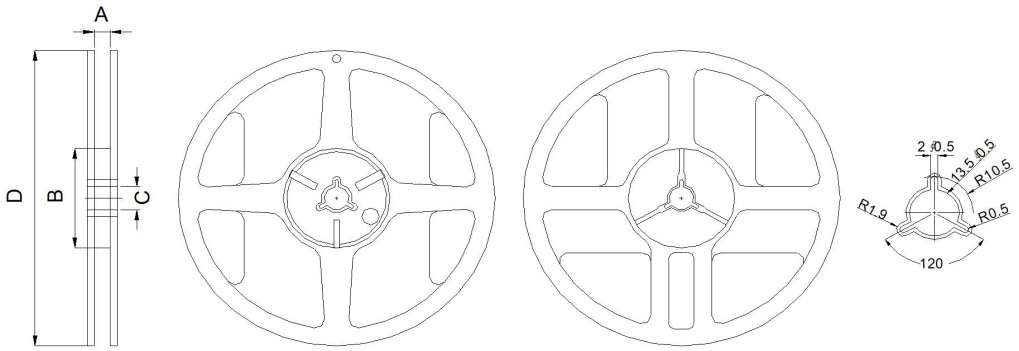

7"x8mm 7"x12mm

Type	A(mm)	B(mm)	C(mm)	D(mm)
7”x8mm	9.0±0.5	60±2	13.5±0.5	178±2

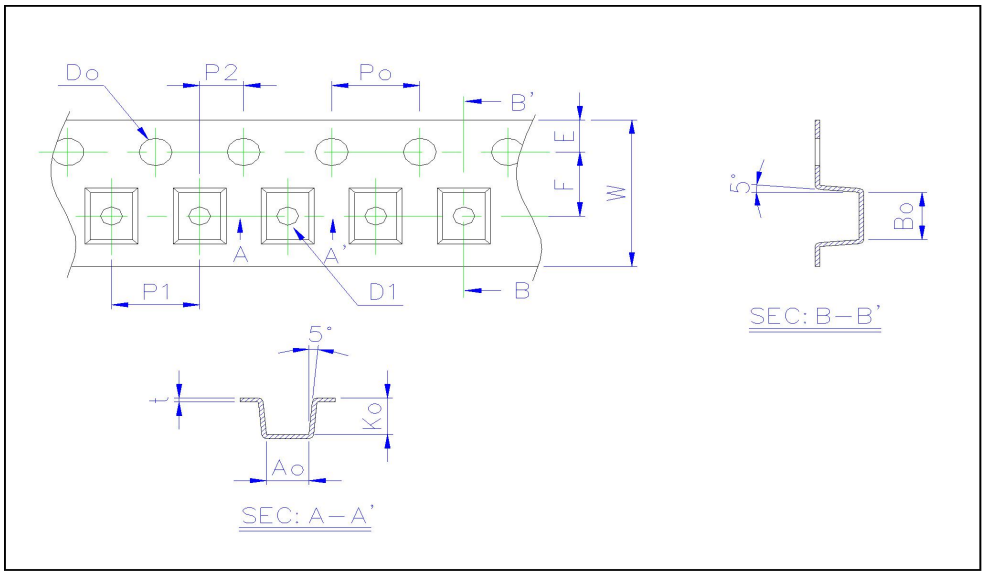

Size	Ao(mm)	Bo(mm)	Ko(mm)	W(mm)	E(mm)	F(mm)	Po(mm)	P1(mm)	Do(mm)
3225	2.80±0.10	3.60±0.10	2.20±0.10	8.00±0.20	1.75±0.10	3.50±0.05	4.0±0.05	4.0±0.10	1.0±0.1