


Features

- ◆ The common mode filter is mainly used to reduce radiation and high frequency common mode noise.
- ◆ Reduce asymmetric interference on CAN, power and other interfaces.
- ◆ Small package large current to meet a variety of circuits
- ◆ Low leakage, no effect on differential mode current
- ◆ Packaging quantity: 1000pcs

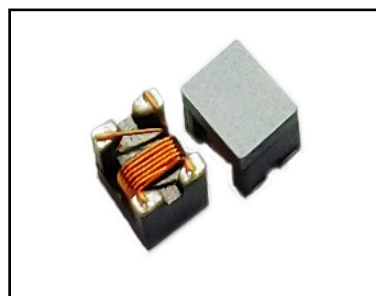

Application

- ◆ Portable devices
- ◆ Digital cameras
- ◆ Player
- ◆ Smart home
- ◆ Robot

Part Numbering

CMF	3225	W	A	102	M	Q	T
A	B	C	D	E	F	G	H

A: ASIM common mode filter

B: Dimension

C: Wire wound

D: Shielding type for 1.0GHz

E: Common Mode Impedance (at 100MHz), 102=1000Ω

F: Tolerance M±25%


G: Internal series

H: Tape





Specification

Part number	Common mode impedance(Ω) @100MHz	Rated Current (mA) max	DC Resistance (Ω) max
CMF3225WA102MQT	1000±25%	1000	0.10
	Rated volt max(Vdc)	Withstand volt (Vdc)	IR (Ω) min
	70.0	125	10M
	Operation junction temperature	Lead temperature	Storage temperature*
	-40°C~+125°C	260°C	-40°C~125°C

Performance Curves

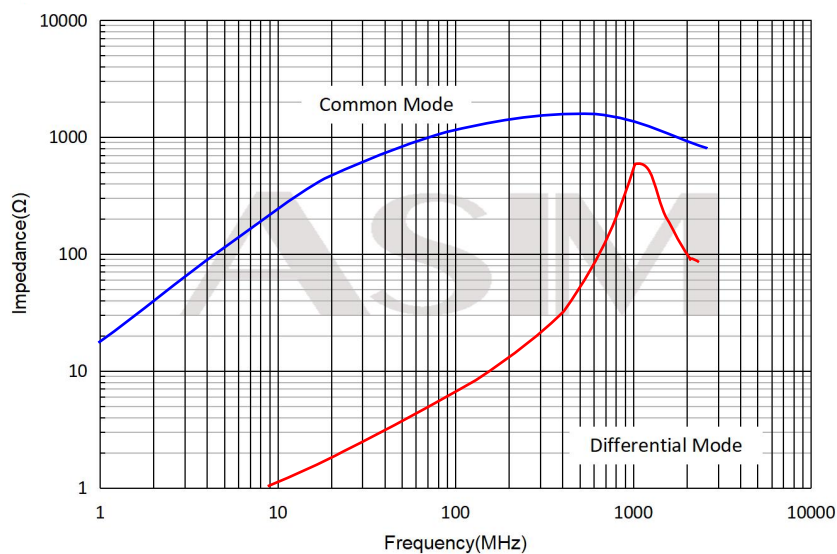


Dimension (mm)



PIN NUMBER	DESCRIPTION
① ~ ②	DATA LINE
④ ~ ③	DATA LINE


Series	A(mm)	B(mm)	C(mm)	D (mm)	E (mm)	F(mm)
3225	3.2±0.2	2.5±0.2	2.1±0.2	0.2±0.1	0.9±0.1	0.8±0.1

Recommended Land Pattern (mm)

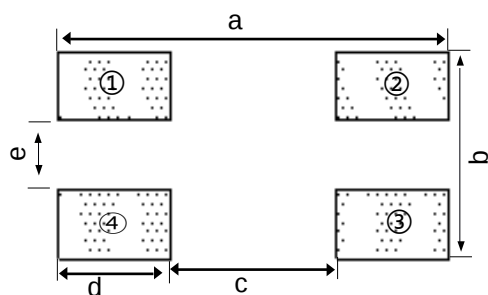


Symbol	a	b	c	d	e
Dimension	3.7	2.55	1.9	0.9	0.75

Recommended Reflow Profile

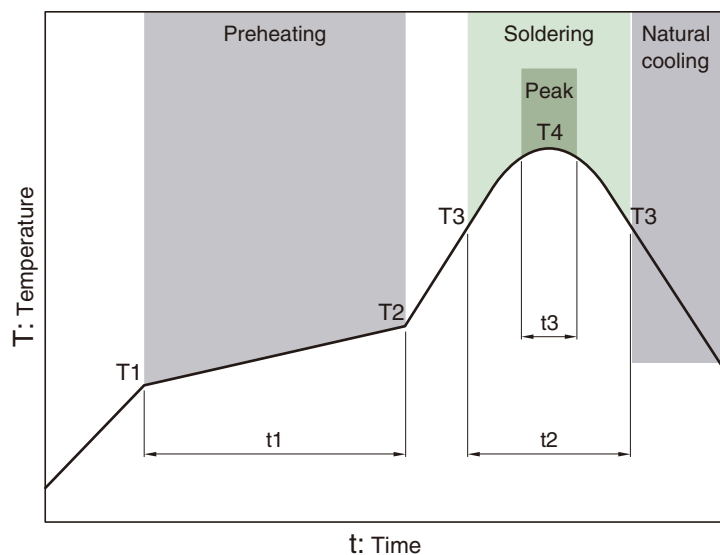


Preheating			Soldering		Peak	
Temp.	Time		Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	25 to 35s	250°C	5s

Reel Dimension&Tape Dimension (mm)

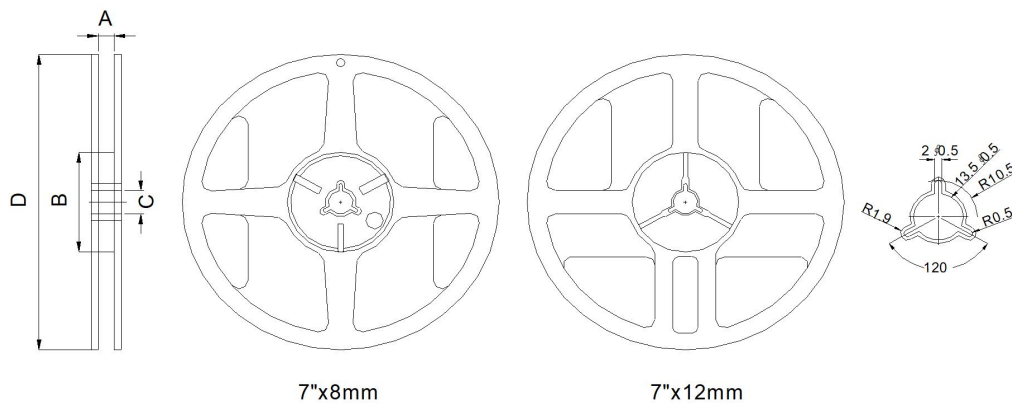

Type	A(mm)	B(mm)	C(mm)	D(mm)
7"x8mm	9.0±0.5	60±2	13.5±0.5	178±2

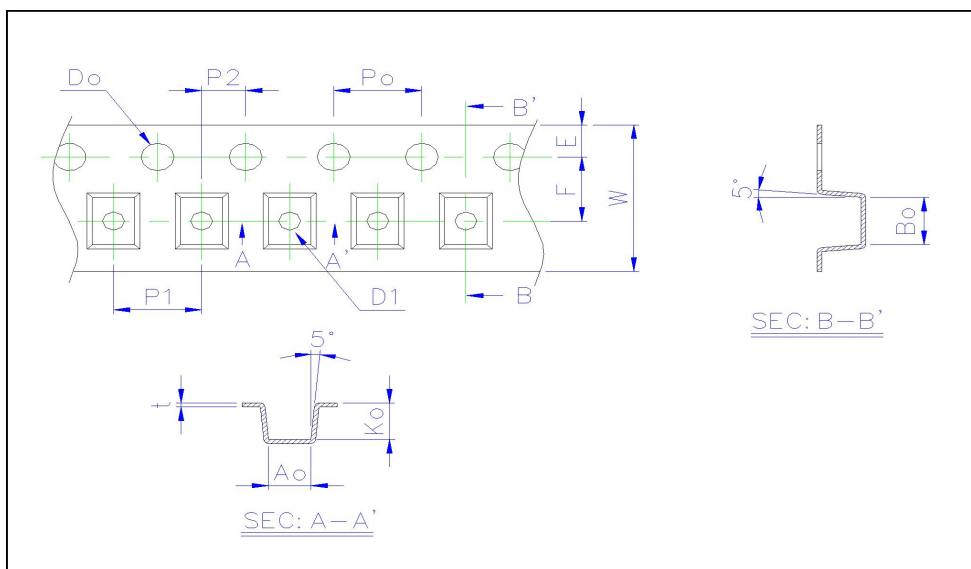

Size	Ao(mm)	Bo(mm)	Ko(mm)	W(mm)	E(mm)	F(mm)	Po(mm)	P1(mm)	Do(mm)
3225	2.80±0.10	3.60±0.10	2.20±0.10	8.00±0.20	1.75±0.10	3.50±0.05	4.0±0.05	4.0±0.10	1.0±0.1