

-20V/-2.0A P-Channel Advanced Power MOSFET

BVDSS	-20	V
ID	-2.0	A
RDSON@VGS=-2.5V	135.0	mΩ
RDSON@VGS=-4.5V	125.0	mΩ

SOT-523





FEATURE

TrenchFET Power MOSFET

APPLICATIONS

- Load Switch for Portable Devices
- DC/DC Converter

Order Information

Product	Package	Marking	Reel
AM20AP020T	SOT-23	S1	3000PCS

Maximum ratings (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	±12	
Continuous Drain Current	I_D	-2.0	A
Pulsed Drain Current	I_{DM}	-6	
Continuous Source-Drain Diode Current	I_S	-0.72	
Maximum Power Dissipation	P_D	0.25	W
Thermal Resistance from Junction to Ambient(t ≤5s)	$R_{\theta JA}$	357	℃/W
Junction Temperature	T_J	150	℃
Storage Temperature	T_{stg}	-55 ~+150	

-20V/-2.0A P-Channel Advanced Power MOSFET

Electrical characteristics (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D =-250μA	-20			V
Gate-source threshold voltage	$V_{GS(th)}$	V_{DS} =V_{GS}, I_D =-250μA	-0.4		-1	
Gate-source leakage	I_{GSS}	V_{DS} =0V, V_{GS} =±10V			±100	nA
Zero gate voltage drain current	I_{DSS}	V_{DS} =-20V, V_{GS} =0V			-1	μA
Drain-source on-state resistance [a]	$R_{DS(on)}$	V_{GS} =-4.5V, I_D =-1.8A		0.125	0.140	Ω
		V_{GS} =-2.5V, I_D =-1.0A		0.135	0.180	
Forward transconductance [a]	g_{fs}	V_{DS} =-5V, I_D =-2.0A		6.5		S
Dynamic[b]						
Input capacitance	C_{iss}	V_{DS} =-10V,V_{GS} =0V,f =1MHz		405		pF
Output capacitance	C_{oss}			75		
Reverse transfer capacitance	C_{rss}			55		
Total gate charge	Q_g	V_{DS} =-10V,V_{GS} =-4.5V,I_D =-3A		5.5	10	nC
		V_{DS} =-10V,V_{GS} =-2.5V,I_D =-3A		3.3	6	
Gate-source charge	Q_{gs}			0.7		
Gate-drain charge	Q_{gd}			1.3		
Gate resistance	R_g	f =1MHz		6.0		Ω
Turn-on delay time	$t_{d(on)}$	V_{DD}=-10V, R_L=10Ω, I_D =-1A, V_{GEN}=-4.5V,Rg=1Ω		11	20	ns
Rise time	t_r			35	60	
Turn-off delay time	$t_{d(off)}$			30	50	
Fall time	t_f			10	20	
Drain-source body diode characteristics						
Continuous source-drain diode current	I_S	T_C=25℃			-1.3	A
Pulse diode forward current [a]	I_{SM}				-10	
Body diode voltage	V_{SD}	I_S=-0.7A		-0.8	-1.2	V

Notes :


a.Pulse Test : Pulse Width < 300μs, Duty Cycle ≤2%.

b.Guaranteed by design, not subject to production testing.


-20V/-2.0A P-Channel Advanced Power MOSFET

Typical Characteristics


Output Characteristics

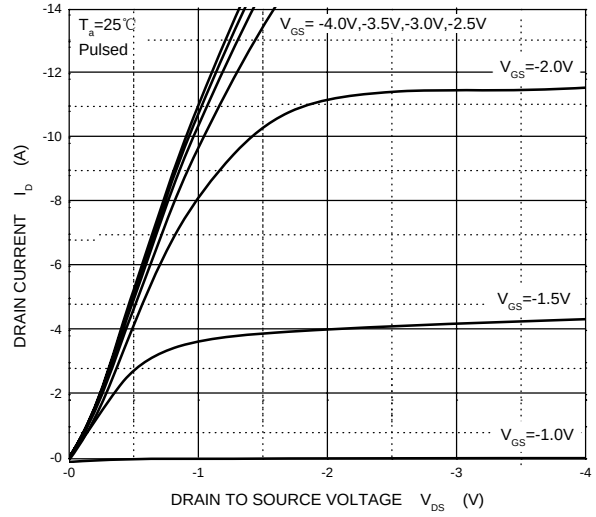


Transfer Characteristics

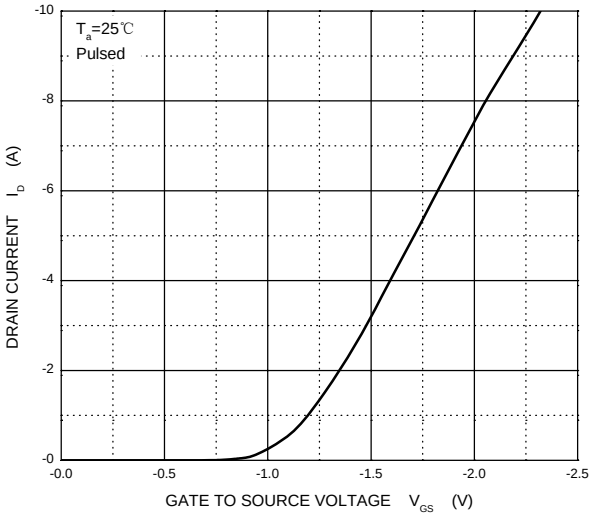


$R_{DS(ON)}$ — I_D

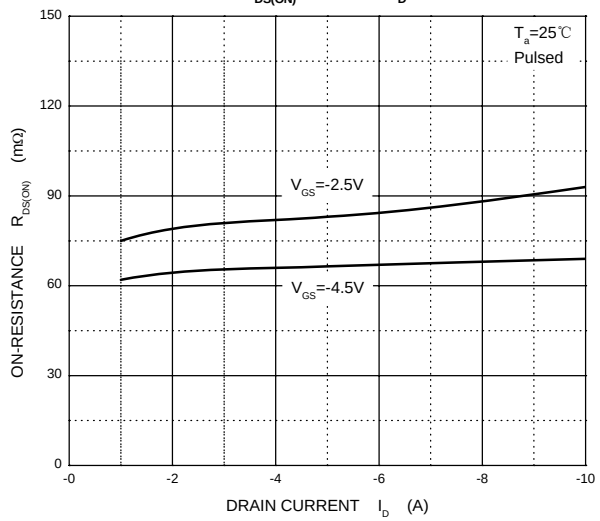

$R_{DS(ON)}$ — V_{GS}

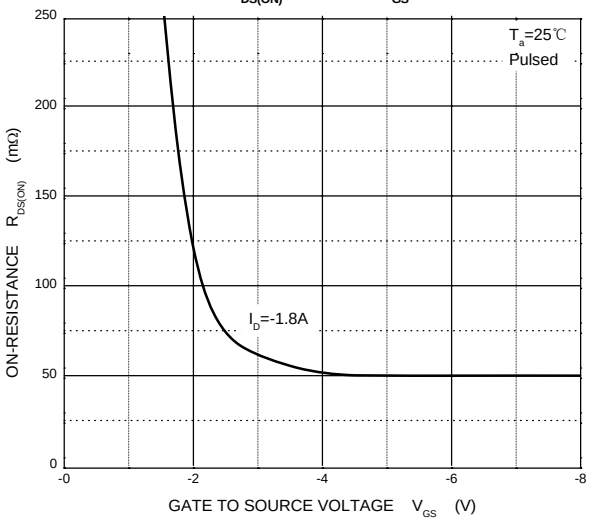



I_S — V_{SD}

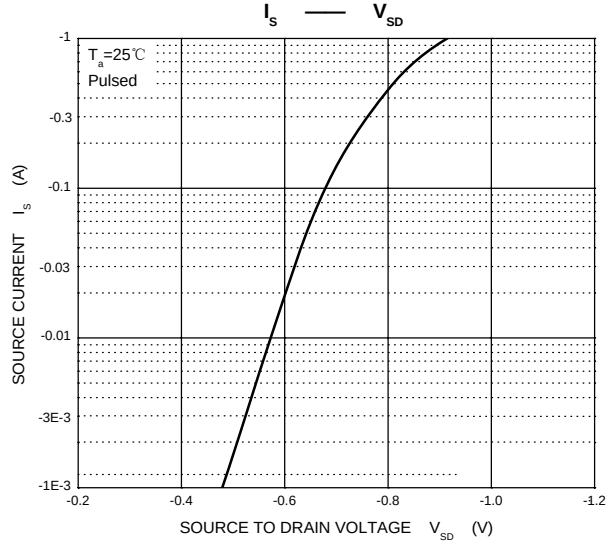


-20V/-2.0A P-Channel Advanced Power MOSFET

SOT-523 Package Outline Dimensions

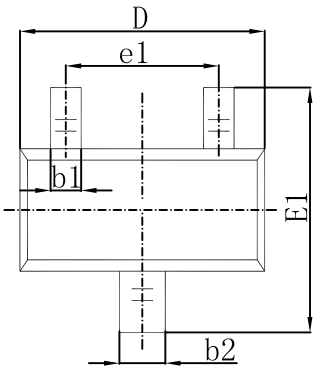

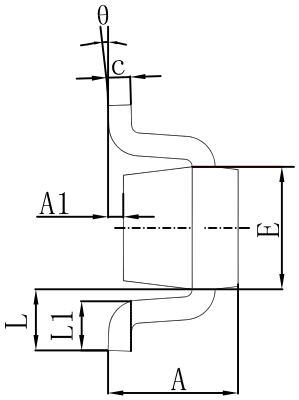



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-523 Suggested Pad Layout

