
Schottky Barrier Diode

FEATURES

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Negligible Reverse Recovery Time
- Low Capacitance

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View



MARKING:E4

Simplified outline SOD-323 and symbol

MECHANICAL DATA

▪Case: SOD-323
▪Terminals: Solderable per MIL-STD-750, Method 2026
▪Approx. Weight: 5.48mg / 0.00019oz

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	Value	Units
Peak Repetitive Reverse Voltage	V_{RRM}	40	V
RMS reverse voltage	V_{RMS}	28	V
Working Peak Reverse Voltage	V_{DC}	40	V
Peak Forward Surge Current, 1.0s single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	1.5	A
Maximum Instantaneous Forward Voltage I_F=20mA	V_F	0.37	V
Maximum Instantaneous Forward Voltage I_F=200mA	V_F	0.60	V
Power Dissipation	P_D	200	mW
V_R=30V	I_R	5	uA
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	300	°C/W
Reverse voltage I_R=100uA	$V_{(BR)R}$	20	V
Reverse recovery time I_F=I_R=200mA,Irr=0.1xI_R,R_L=100Ω	trr	10	ns
Forward Continuons Current	I_{FM}	380	mA
Total capacitance V_R=0V.f=1MHz	C_{tot}	50	pF
Junction temperature	T_j	125	℃
Storage temperature	T_{stg}	-55 ~ +150	℃

Fig.1 Forward Current Derating Curve

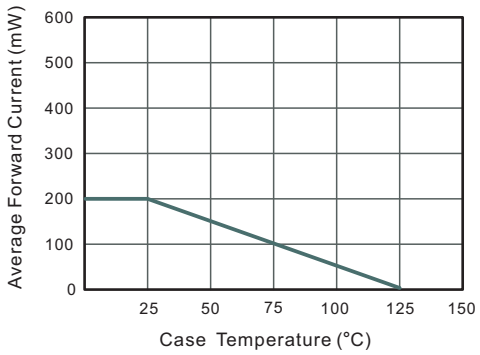


Fig.2 Typical Reverse Characteristics

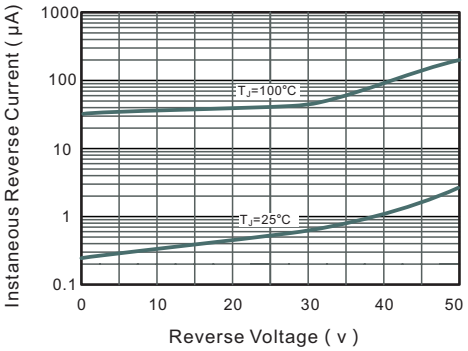


Fig.3 Forward Characteristics

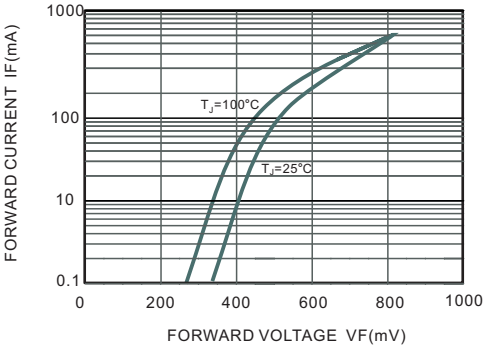


Fig.4 Maximum Non-Repetitive Peak Forward Surage Current


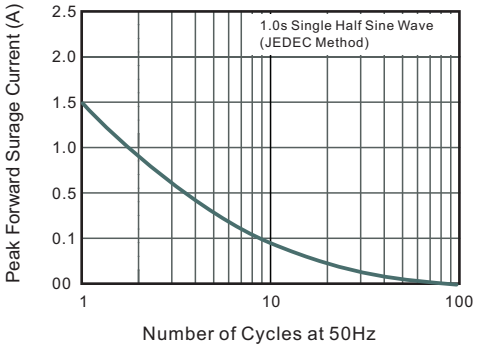



Fig.4 Typical Junction Capacitance

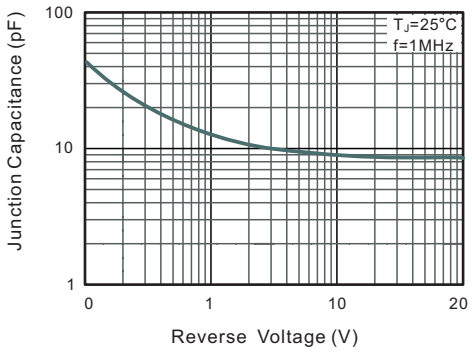

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323

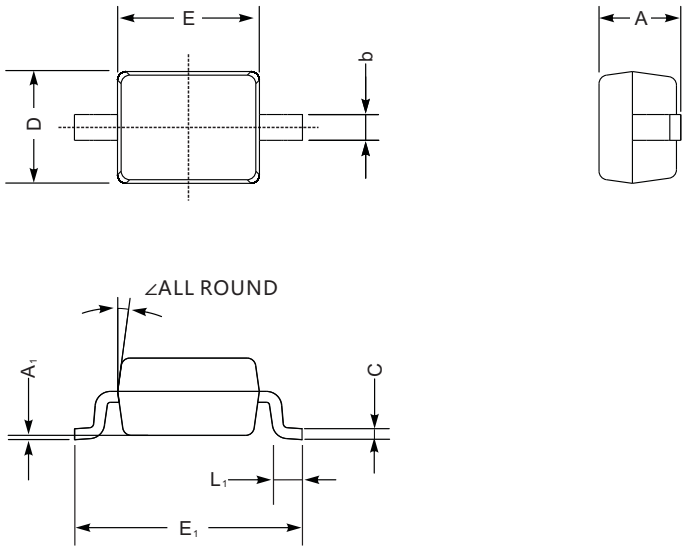

SOD-323 mechanical data

UNIT		A	C	D	E	E_1	b	L_1	A_1	∠
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	
	min	32	3.1	47	63	100	9.8	7.9	—	

The recommended mounting pad size

