

SCHOTTKY BARRIER DIODE

FEATURES


- Extremely small surface mounting type.
- Low V_F .
- High reliability.
- We declare that the material of product compliance with RoHS requirements and Halogen Free.

Applications

- Low current rectification.

DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
AS1P40T		3000/Tape&Reel

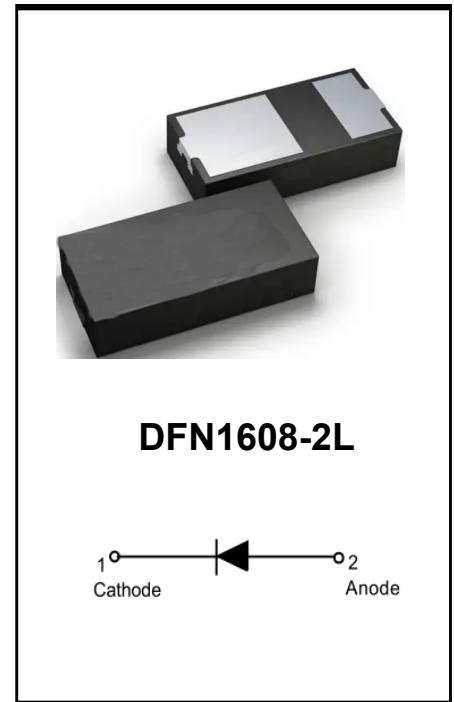

MAXIMUM RATINGS (Ta=25 °C)





Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Repetitive peak reverse voltage		V_{RRM}			40	V
Reverse voltage		V_R			40	V
Average forward rectified current		I_o			1	A
Forward current, surge peak	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}			8	A
Power dissipation		P_D			500	mW
Thermal resistance	Junction to ambient	$R_{\theta JA}$		180		°C/W
Junction temperature		T_j	-55		+150	°C
Storage temperature		T_{STG}	-55		+150	°C

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 100mA$	V_F			0.36	V
	$I_F = 500mA$				0.46	
	$I_F = 1000mA$				0.55	
Reverse current	$V_R = 10V$	I_R			15.0	μA
	$V_R = 40V$				40.0	
Capacitance between terminals	$V_R = 0V, f = 1MHz$	C_T		120		pF


SCHOTTKY BARRIER DIODE

ELECTRICAL CHARACTERISTICS CURVES

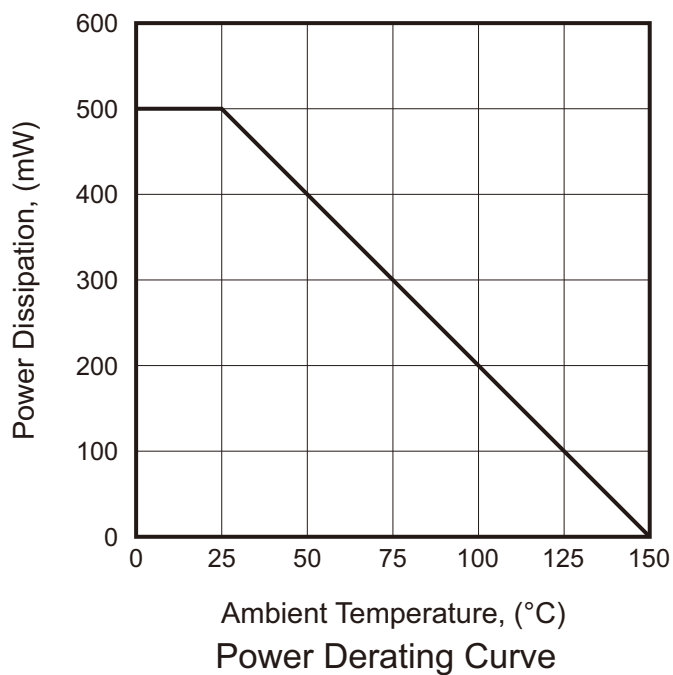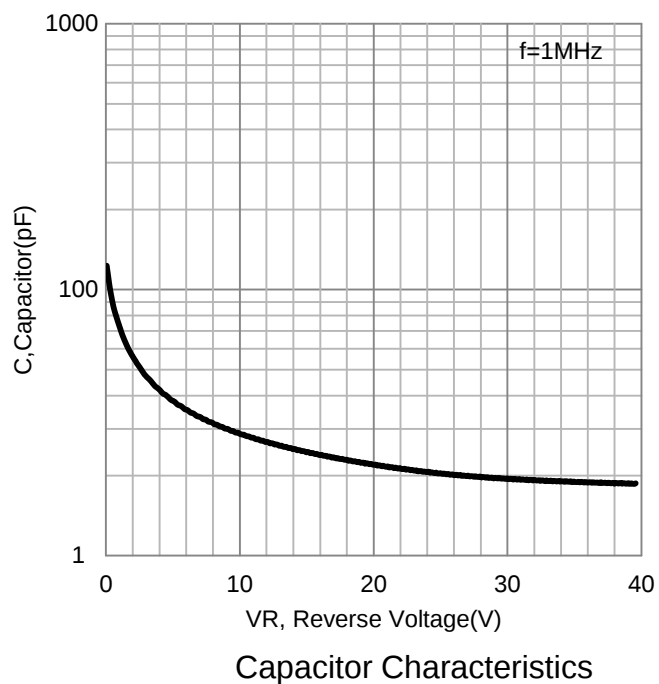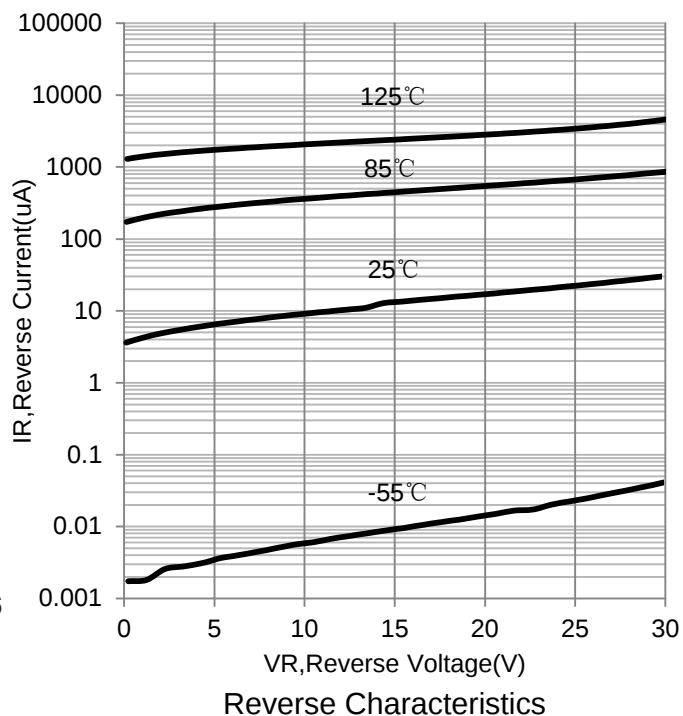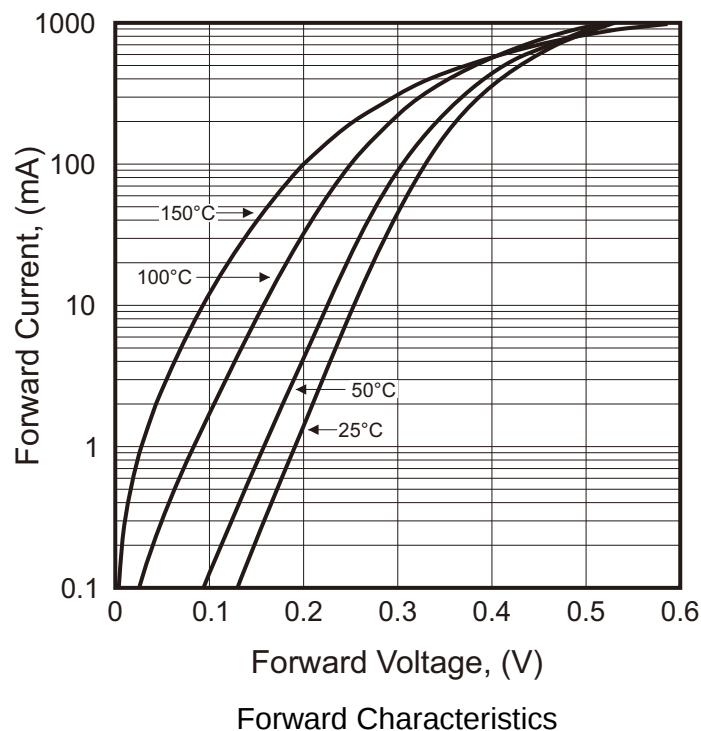

SCHOTTKY BARRIER DIODE

DFN1608-2L Package Outline Drawing Unit:mm

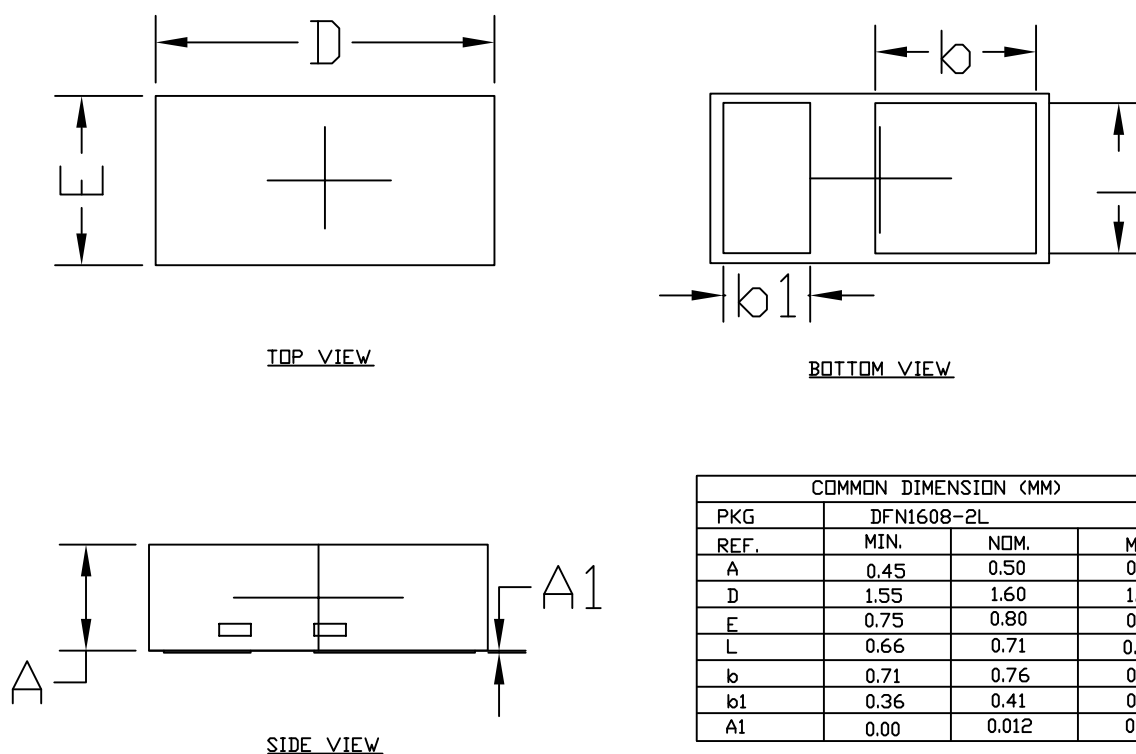

Suggested Land Pattern Unit:mm

