

Descriptions

CMF1210DH900EFR principle with its unique structure, which not only can restrain the common-mode EMI noise, and can absorb electrostatic, therefore they are widely used in USB2.0, an LVDS, HDMI, MIPI high-speed differential signal lines.

CMF1210DH900EFR is available in 1210 package. Standard products are Pb-free and comply with ROHS.



Application

- ◆ Mobile phone
- ◆ Bluetooth or WIFI player
- ◆ Communication systems
- ◆ Tablet computer

Naming rules

<u>CMF</u>	<u>1210</u>	<u>DH</u>	<u>900</u>	<u>E</u>	<u>F</u>	<u>R</u>
(1)	(2)	(3)	(4)	(5)	(6)	(7)

(1) Common Mode Filter

(2) Dimensions, 1.2mm (L) x 1.0mm (W)

(3) DH: High speed

(4) Common Mode Impedance (at 100MHz), 900= 90Ω

(5) E:ESD protection

(6) Type of electrode plating: F= Lead Free

(7) Packing Type, R= Reel

Quantity Per Reel: 4,000pcs

Electrical characteristics (T=25°C)



Common mode parameters

Imp.Com (Ω) ±25% @100MHZ	DCR (max) (Ω)	Rated Current (max) (mA)
90	4.0	100

ESD parameters

parameter	symbol	condition	Min	Type	Max	Unit
Reverse stand-off voltage	V _{RWM}				±5	V
Reverse leakage current	I _R	V _{RWM} =5V			0.5	uA
Reveres breakdown voltage	V _{BR}	I _T =1mA		500		V
Clamping voltage	V _C	@I _{PP} t _p =8/20us		50		V
Junction capacitance	C _J	V _R =0V,f=1MHZ		1.0	2	pF


Typical characteristic (T=25°C)

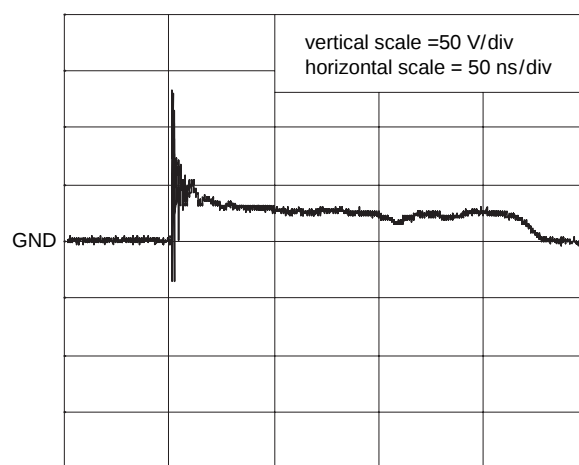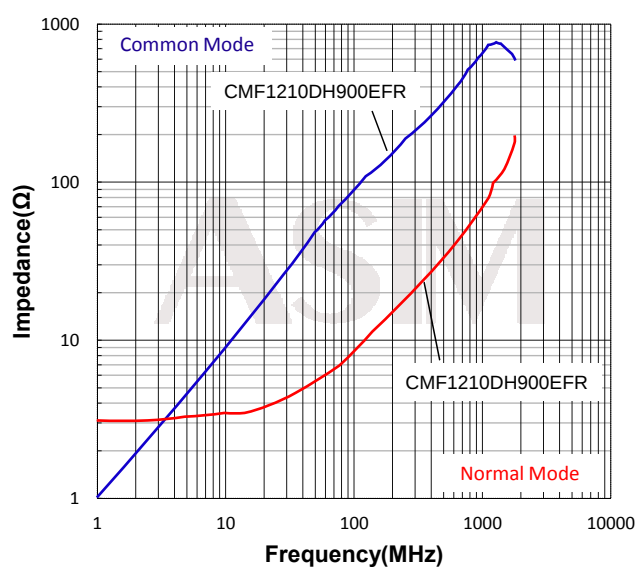

ESD clamping
(+8kV contact discharge per IEC61000-4-2)

Package outline dimensions (Unit: mm)

SHAPE AND DIMENSIONS

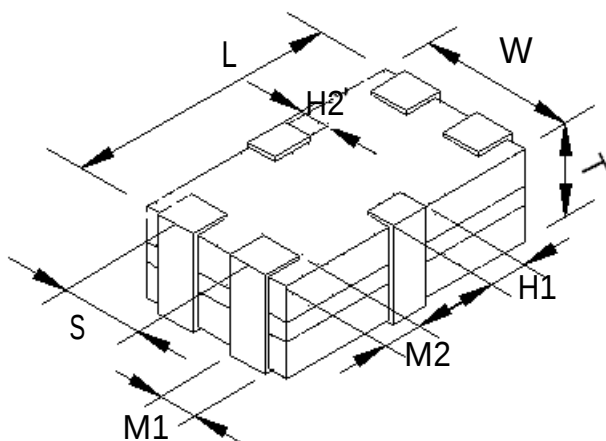

TYPE	Dimension
L	1.27 ± 0.10
W	1.00 ± 0.10
T	0.70 ± 0.10
S	0.55 ± 0.10
M1	0.30 ± 0.05
M2	0.15 ± 0.05
H1	0.30 ± 0.05
H2	0.20 ± 0.15

CIRCUIT CONFIGURATION & LAYOUT PAD (Unit: mm)

