
2.0Amp Super Fast Recovery Surface Mounted Rectifiers

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Idea for printed circuit board
- Glass passivated Junction chip
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed 250℃/10 seconds at terminals

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

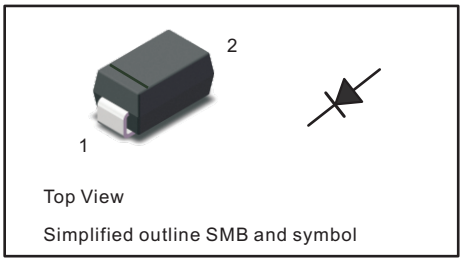

Top View

Simplified outline SMB and symbol

Mechanical Data

Case : Molded plastic body
Terminals : Solder plated, solderable per MIL-STD-750,Method 2026
Polarity : Polarity symbol marking on body
Mounting Position : Any
Weight : 0.0035 ounce, 0.098 grams

Marking



Product Name,X : A.B.....K

Maximum Ratings And Electrical Characteristics

Ratings at 25℃ ambient temperature unless otherwise specified. Single phase half-wave 60Hz,resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbols	ES2AB	ES2BB	ES2CB	ES2DB	ES2FB	ES2GB	ES2JB	ES2KB	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	800	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	560	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	600	800	V
Maximum average forward rectified current at T_L=100℃	$I_{(AV)}$	2.0								A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	50.0								A
Maximum instantaneous forward voltage at 2.0A	V_F	1.0				1.3		1.8		V
Maximum DC reverse current T_A =25℃ at rated DC blocking voltage T_A=125℃	I_R	5.0 500								uA
Maxinum reverse recovery time(Note 1)	Trr	35								ns
Typical junction capacitance (Note2)	C_J	55.0								pF
Typical thermal resistance	R_{qJA}	85.0								°C/W
Operating junction and storage temperature range	T_J,T_{STG}	-55 to +150								°C

Note: 1.Reverse recovery time test condition: IF=0.5A IR=1.0A Irr=0.25A
2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2.0Amp Super Fast Recovery Surface Mounted Rectifiers

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

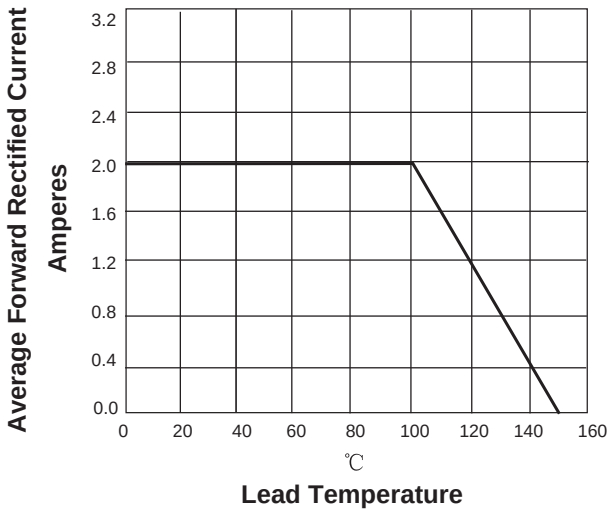


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

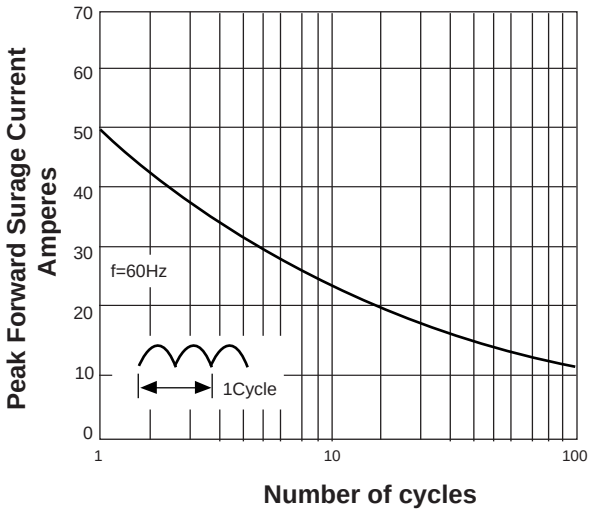


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS


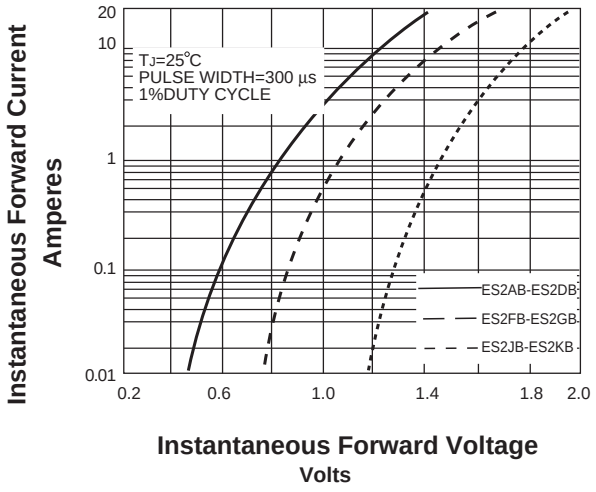



FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

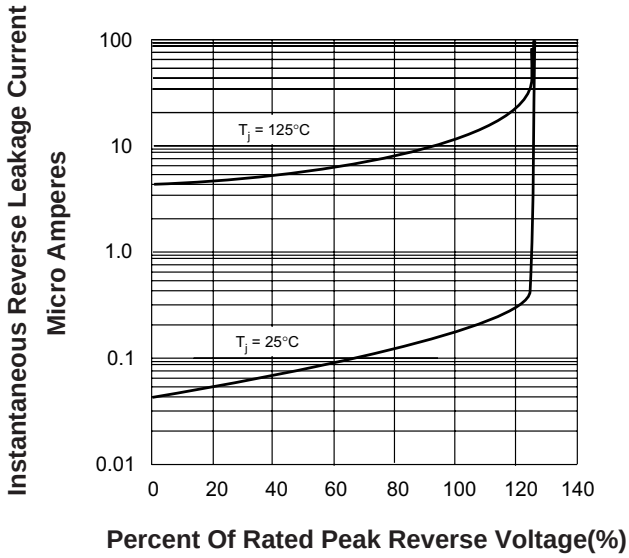


2.0Amp Super Fast Recovery Surface Mounted Rectifiers

Dimensions in inches and (millimeters)

DO-214AA/SMB

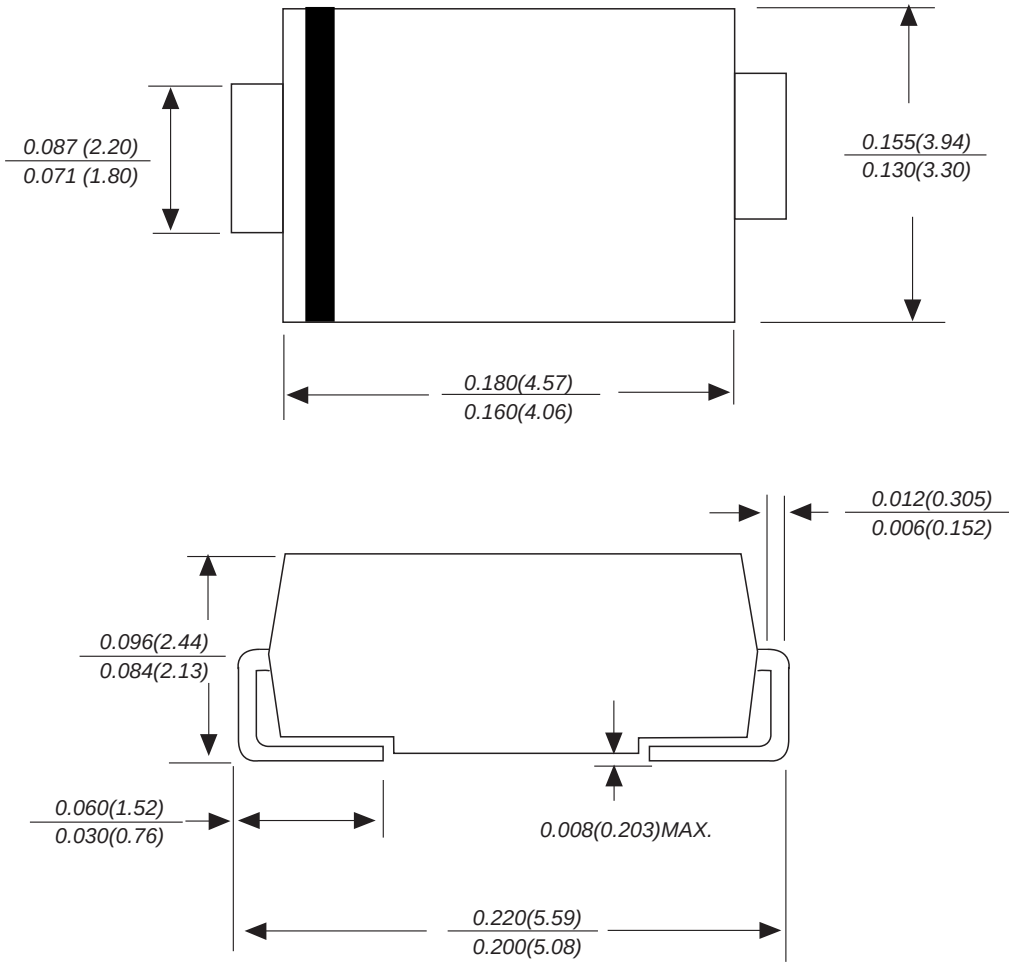


Suggested Pad Layout

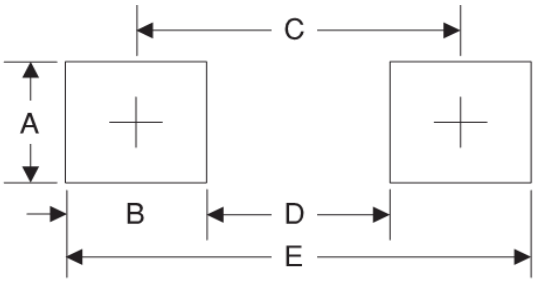

Symbol	Unit (mm)	Unit (inch)
A	2.30	0.091
B	2.00	0.078
C	4.10	0.161
D	2.10	0.083
E	6.10	0.240

2.0Amp Super Fast Recovery Surface Mounted Rectifiers

Suggested Soldering Temperature Profile

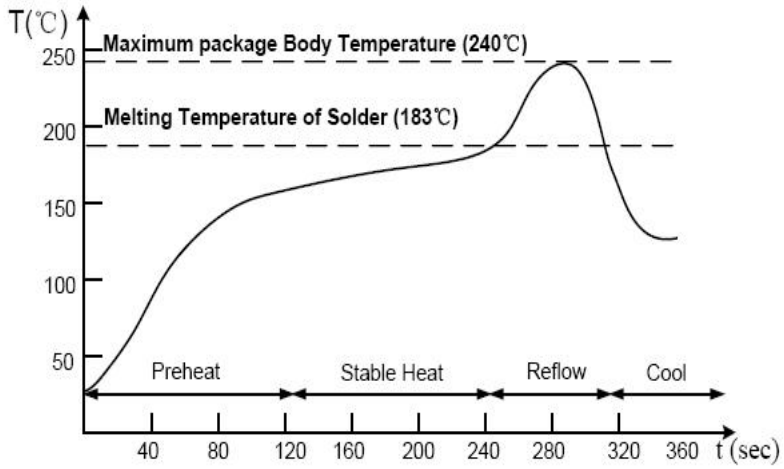


Note

- Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- The device can be exposed to a maximum temperature of 265°C for 10 seconds.
- Devices can be cleaned using standard industry methods and solvents.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Package Information

Carrier Dimension(mm)

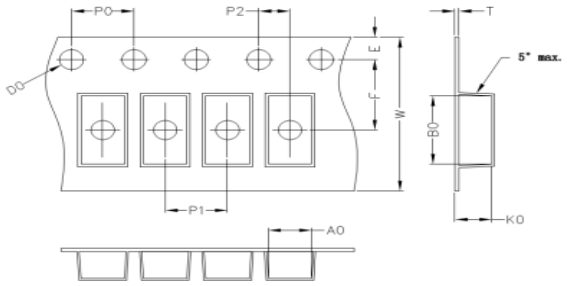

A0	B0	K0	D0	E	F
3.80	5.40	2.45	1.55	1.75	5.50
P0	**P1**	**P2**	**T**	**W**	**Tolerance**
4.0	8.0	2.0	0.25	12	0.1

Package Specifications

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
SMB	13'	330	3.0	340	6.0	360*360*360	48