



Desicription

- ◆ This a high power TVS, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive lines. It is assembled into a 3-pin DFN2020-3 lead-free package. The combination of small size, and high surge capability makes them ideal for use in applications such as cellular

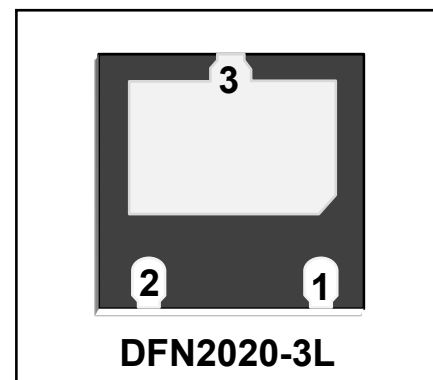

Features

- ◆ IEC61000-4-2(ESD): $\pm 30\text{KV}$ Max Air
 $\pm 30\text{KV}$ Max Contact
- ◆ IEC61000-4-5(Surge): 150A (8/20us)
- ◆ Very low reverse current: $I_R < 0.2\mu\text{A}$ (typical)
- ◆ Halogen free ,Lead free and RoHs

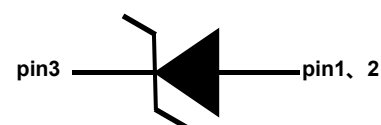

Circuit Diagram

Application

- ◆ Cellular phones
- ◆ Power Management
- ◆ Industrial Application
- ◆ Power Supply Protection
- ◆ Portable devices
- ◆ Smart home
- ◆ Robot

Order information


Model	Marking	Package	shipping
ESD18J501TRN	H18	DFN2020-3L	3000/Tape&Reel

Electrical characteristic(T=25°C, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	TYP.	Max.	Units
Reverse stand-off voltage	V_{RWM} pin3 to pin1/2				18.0	V
Reverse leakage current	I_R pin3 to pin1/2	$V_{RWM}=18V$			0.2	uA
Reveres breakdown voltage	V_{BR} pin3 to pin1/2	$I_T=1mA$	19.0			V
Clamping voltage	V_C pin3 to pin1/2	$I_{PP}=1A(8/20us)$			22.0	V
		$I_{PP}=150A(8/20us)$			38.0	V

Electrical characteristic(T=25°C, unless otherwise specified)


Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance
I_F	Forward Current
V_F	Forward Voltage @ I_F

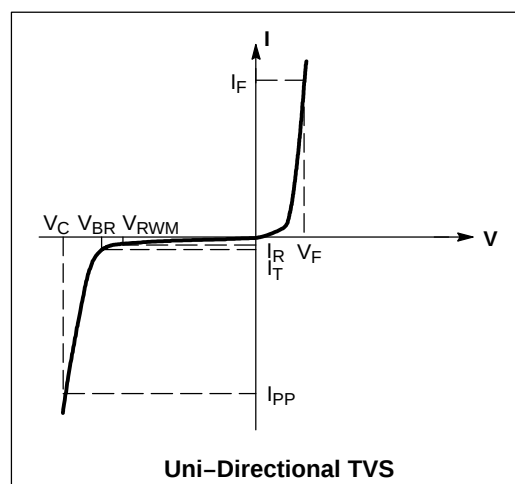


Maximum Rating

Rating	symbol	value	Units
Peak Pulse Current($t_p=8/20\mu s$)	I_{pp}	150.0	A
ESD per IEC61000-4-2(Contact)	V_{ESD}	± 30	KV
ESD per IEC61000-4-2(Air)		± 30	
Operating Temperature	T_J	-55~125	$^{\circ}C$
Storage Temperature	T_{STG}	-55~155	$^{\circ}C$


Typical characteristic

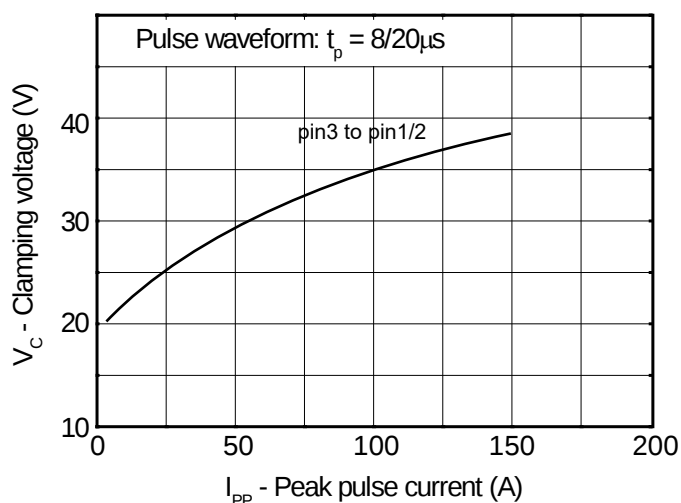


Clamping voltage vs. Peak pulse current

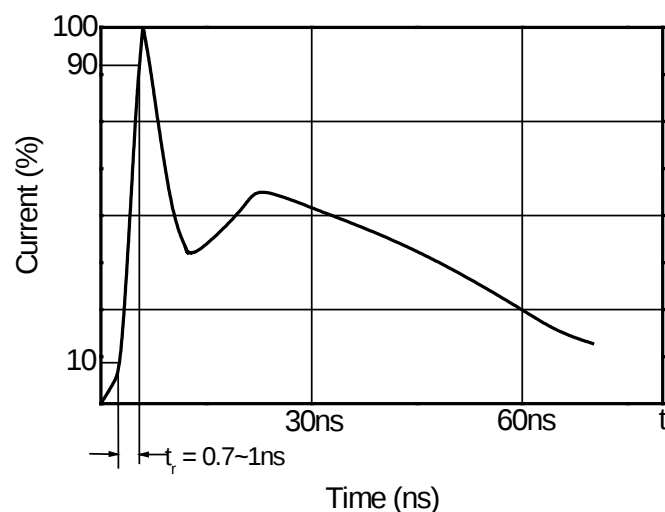


Contact discharge current waveform per IEC61000-4-2

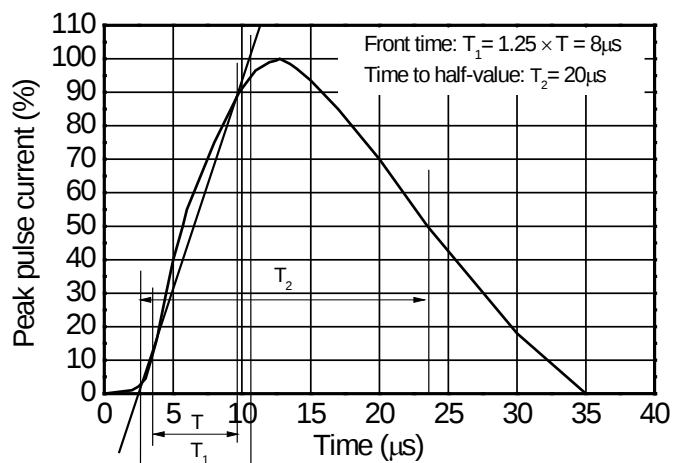

8/20 μs waveform per IEC61000-4-5

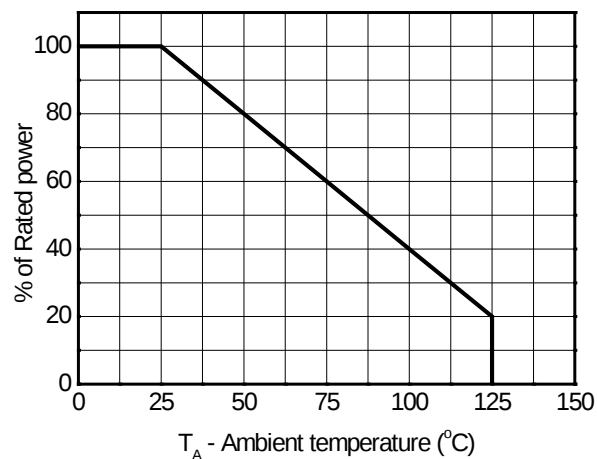


Power derating vs. Ambient temperature

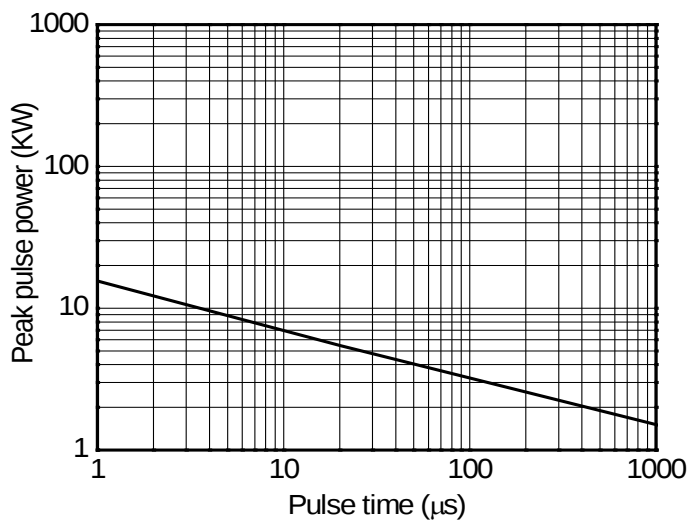

Non-repetitive peak pulse power vs. Pulse time

Dimension outline Unit:mm

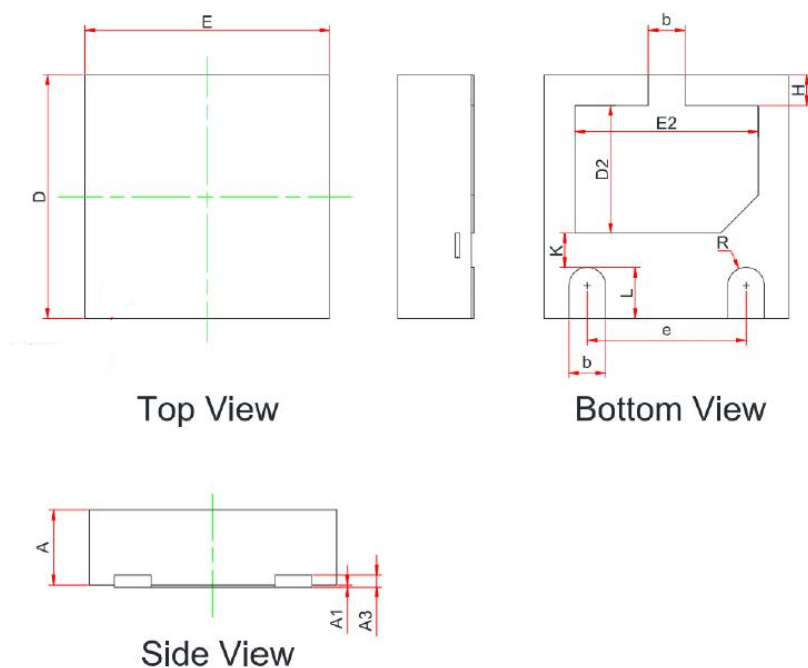DFN2020-3L


SYM	DIMENSIONS		
	MILLIMETERS		
	MIN	NOM	MAX
A	0.50	0.60	0.65
A1	0.00	0.02	0.05
A3	0.10REF		
b	0.25	--	0.35
D	1.90	--	2.10
E	1.90	--	2.10
D2	0.95	--	1.15
E2	1.40	--	1.60
e	1.20		1.40
H	0.20	--	0.30
K	0.20		0.40
L	0.35	--	0.45
R	0.13	--	--

Recommended Mounting Pad Layout Unit:mm
