


## Description

- ◆ This low-power TVS (Transient Voltage Suppressor) is mainly used for signal and power supply to protect the back-stage circuit from ESD(Electrostatic Discharge) and EFT(Electrical Fast Transients) and improve the reliability of the product, because its extremely small package is suitable for various portable devices and mobile electronic devices.



## Features

- ◆ IEC61000-4-2(ESD): ±30KV Max Air  
±30KV Max Contact
- ◆ IEC61000-4-4(EFT): 40A(5/50ns)
- ◆ IEC61000-4-5(Surge): 9.0A(8/20us)
- ◆ Line capacitance: 25.0pF(typical)@1MHz
- ◆ Very low reverse current:  $I_R < 0.2\mu A$ (typical)
- ◆ Halogen free ,Lead free and RoHs
- ◆ AEC-Q101

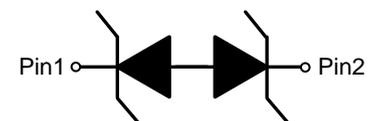

**Circuit diagram**

## Application

- ◆ Cellular phones
- ◆ Portable devices
- ◆ Digital cameras
- ◆ Player
- ◆ Smart home
- ◆ Robot

## Order information

Model	Marking	Package	shipping
ESD24A250TBC	2H	SOD323	3000/Tape&Reel


**Electrical characteristic(T=25°C, unless otherwise specified)**

Parameter	Symbol	Conditions	Min.	TYP.	Max.	Units
Reverse stand-off voltage	$V_{RWM}$				$\pm 24.0$	V
Reverse leakage current	$I_R$	$V_{RWM} = 24.0V$			0.2	$\mu A$
Reverse breakdown voltage	$V_{BR}$	$I_T = 1mA$	25.0			V
Clamping voltage	$V_C$	$I_{PP} = 1A(8/20\mu s)$			36.0	V
		$I_{PP} = 9.0A(8/20\mu s)$			48.0	V
Junction capacitance	$C_J$	$V_R = 0V$ $f = 1MHz$		25.0	45.0	pF

**Electrical characteristic(T=25°C, unless otherwise specified)**

**Electrical performance curve**

- $V_C$ : Maximum clamping voltage
- $V_{br}$ : Reverse breakdown voltage
- $V_{RWM}$ : Working voltage
- $I_{PP}$ : Maximum peak current

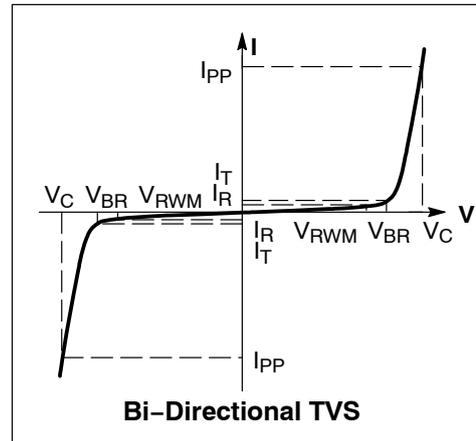


**Bi-Directional TVS**


### Maximum Rating

Rating	symbol	value	Units
Peak Pulse Current( $t_p=8/20\mu s$ )	$I_{pp}$	9.0	A
ESD per IEC61000-4-2(Contact)	$V_{ESD}$	$\pm 30$	KV
ESD per IEC61000-4-2(Air)		$\pm 30$	
Operating Temperature	$T_J$	-55~125	$^{\circ}C$
Storage Temperature	$T_{STG}$	-55~150	$^{\circ}C$


### Typical characteristic

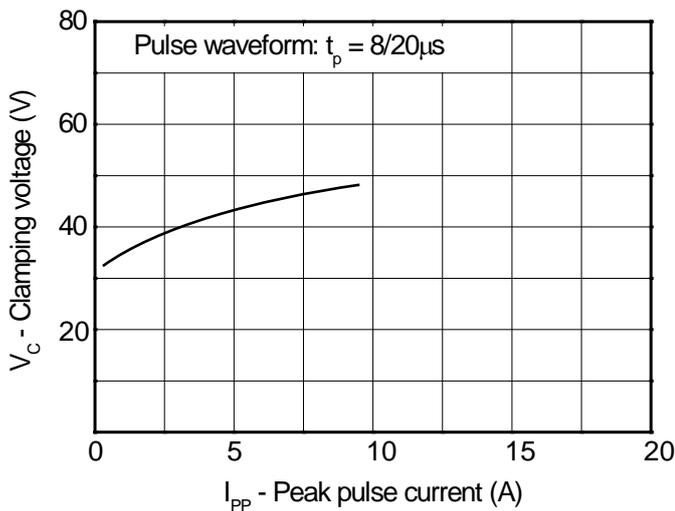


Clamping voltage vs. Peak pulse current

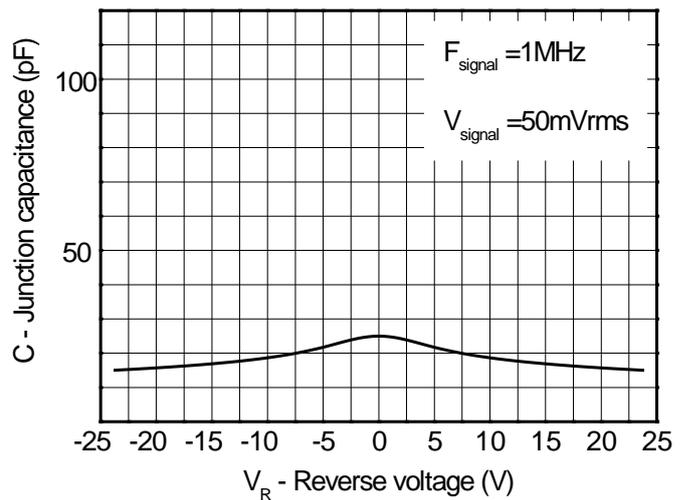


Capacitance vs. Reverse voltage

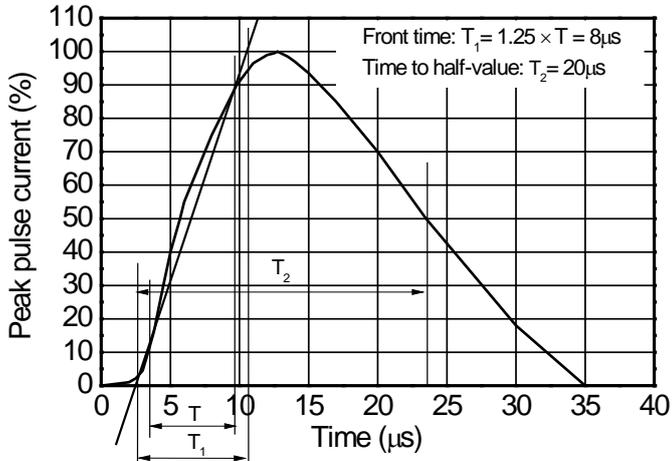


8/20 $\mu\text{s}$  waveform per IEC61000-4-5

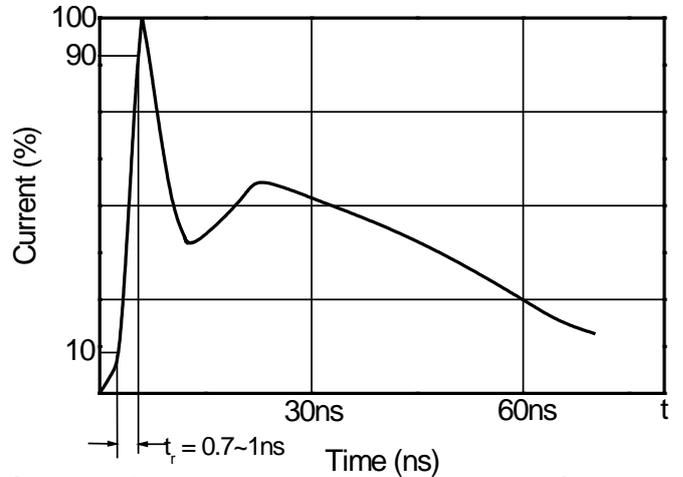

Contact discharge current waveform per IEC61000-4-2

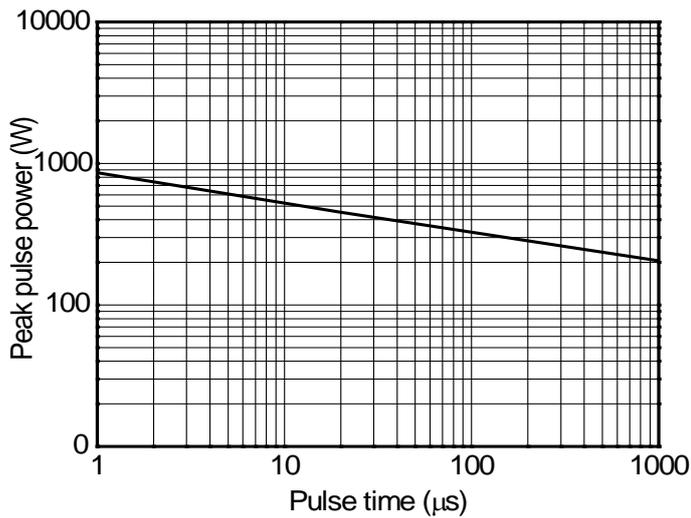


Non-repetitive peak pulse power vs. Pulse time

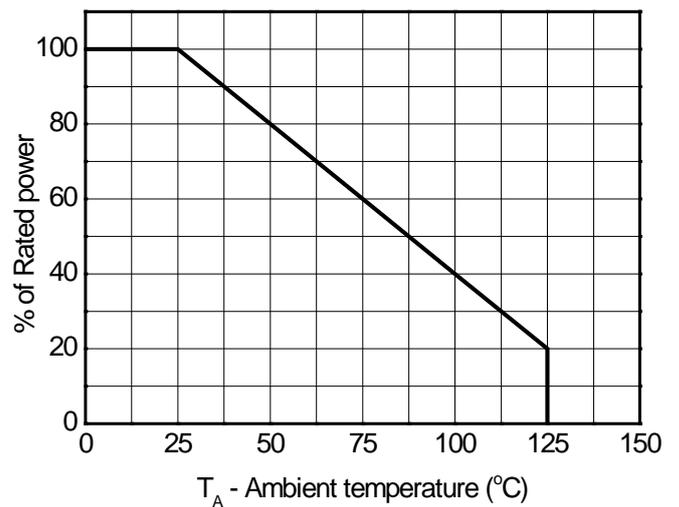

Power derating vs. Ambient temperature


**Dimension outline** Unit:mm

**SOD323**

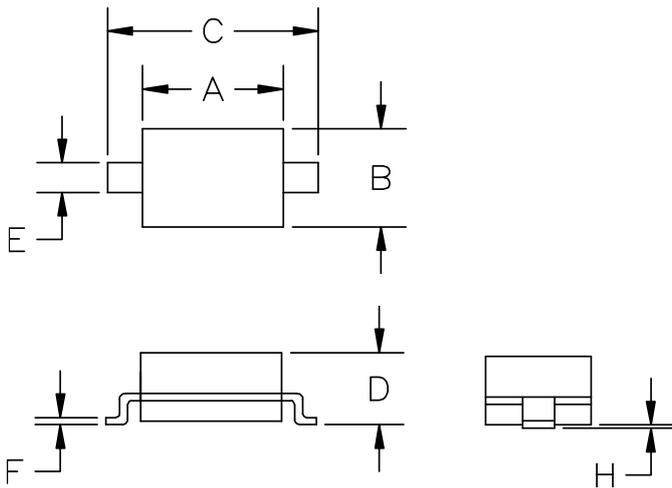

SYM	DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.50	1.80	0.060	0.071
B	1.20	1.40	0.045	0.054
C	2.30	2.70	0.090	0.107
D	-	1.10	-	0.043
E	0.30	0.40	0.012	0.016
F	0.10	0.25	0.004	0.010
H	-	0.10	-	0.004

**Recommended Mounting Pad Layout** Unit:mm

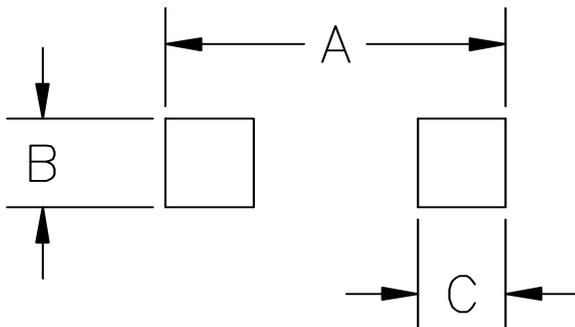

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
A	3.15	0.120
B	0.80	0.031
C	0.80	0.031