1-Line, Bi-directional, Transient Voltage Suppressors


Descriptions

The ESD5U100TA is a bi-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD5U100TA is available in SC-104 package. Standard products are Pb-free and Halogen-free.



SC-104

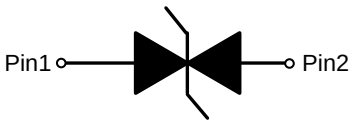

Circuit diagram

Features

- Stand-off voltage: ±5.0V Max
- Transient protection for each line according to
  IEC61000-4-2 (ESD): ±30KV Air, ±30 KV contact
  IEC61000-4-5 (Surge): 5.0A Max (8/20μs)
- Solid-state silicon technology
- Low leakage current

Order information

Device	Package	Shipping
ESD5U100TA	SC-104	10000/Tape&Reel

Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Serves
- Portable Instrumentation
- Digital Cameras
- CAR/MID DVD/MP3/MP4/PMP Players

Absolute maximum ratings

Parameter	Symbol	Rating	Unit
Peak pulse current (t_p = 8/20μs)	$I_{PP\,Max}$	5.0	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	±30	kV
ESD according to IEC61000-4-2 contact discharge		±30	
Operating temperature	T_{OP}	-40~125	°C
Lead temperature	T_L	260	C
Storage temperature	T_{STG}	-55~150	°C

Electrical characteristics (TA=25 °C ,unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V_{RWM}				±5.0	V
Reverse leakage current	I_R	V_{RWM} = 5.0V			0.2	uA
Reveres breakdown voltage	V_{BR}	I_T=1mA	5.5			V
Clamping voltage	V_C	Ipp=1A tp=8/20us		8.5		V
		Ipp=5.0 A tp=8/20us		10.0	12.0	V
Junction capacitance	C_J	V_R = 0V, f = 1MHz		10.0	20.0	pF


Electrical performance curve

V_C : Maximum clamping voltage


V_{br} : Reverse breakdown voltage

V_{RWM} : Working voltage


I_{PP} : Maximum peak current

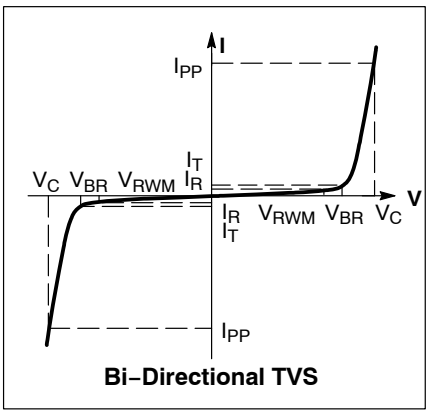


Typical characteristics (T_A=25°C, unless otherwise noted)

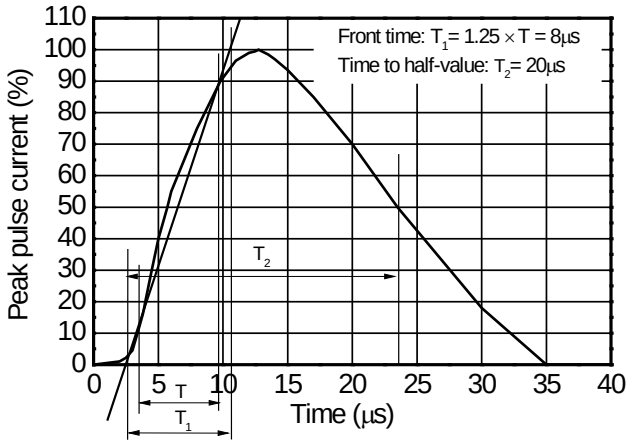


8/20μs waveform per IEC61000-4-5

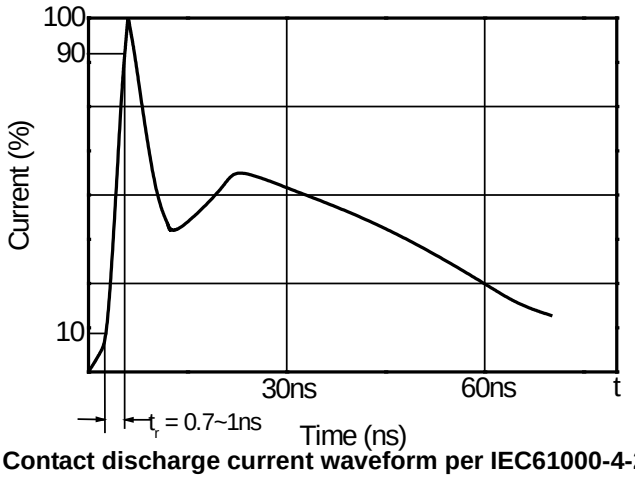


Contact discharge current waveform per IEC61000-4-2

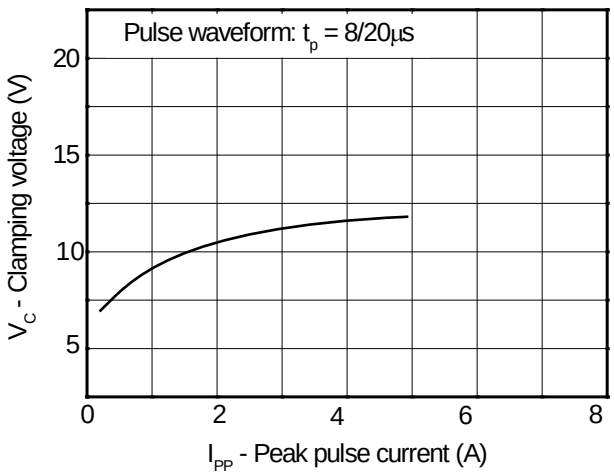


Clamping voltage vs. Peak pulse current

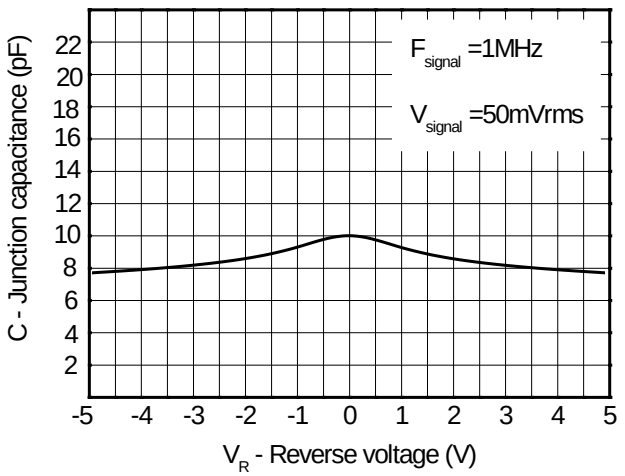

Capacitance vs. Reveres voltage

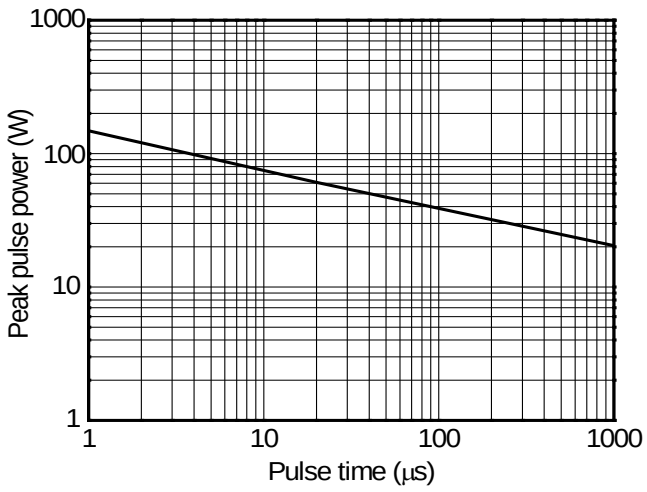



Non-repetitive peak pulse power vs. Pulse time

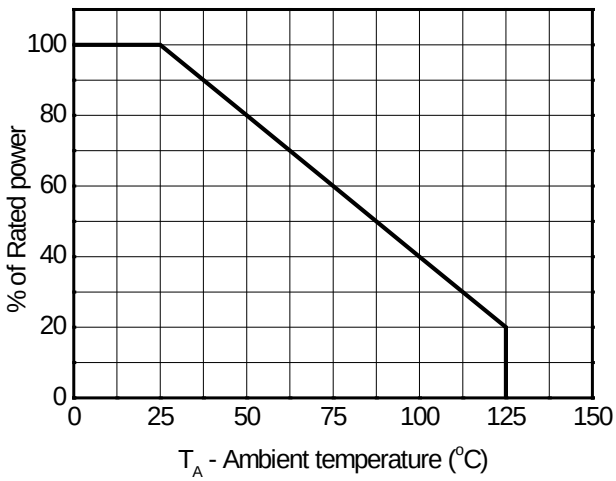


Power derating vs. Ambient temperature

ESD clamping test setup and waveforms

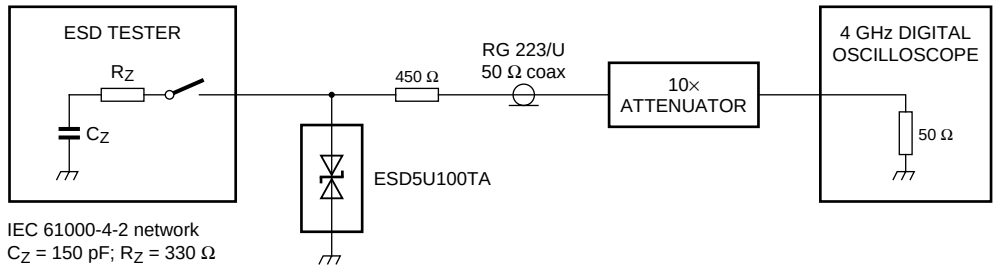

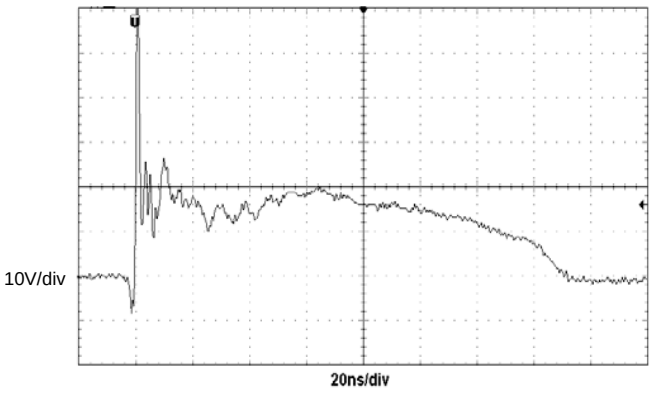


ESD clamping
(+8kV contact discharge per IEC61000-4-2)

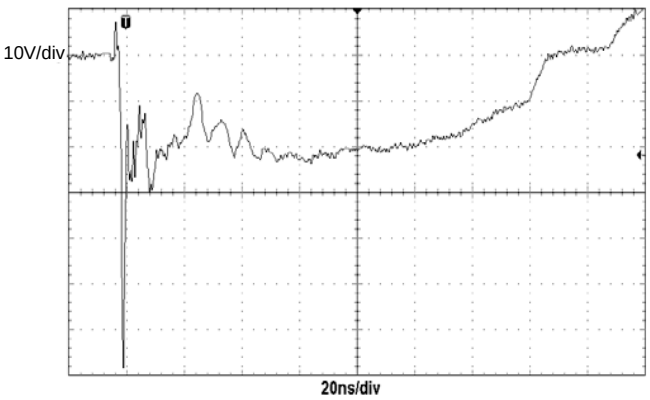

ESD clamping
(-8kV contact discharge per IEC61000-4-2)

Package outline dimensions

SC-104

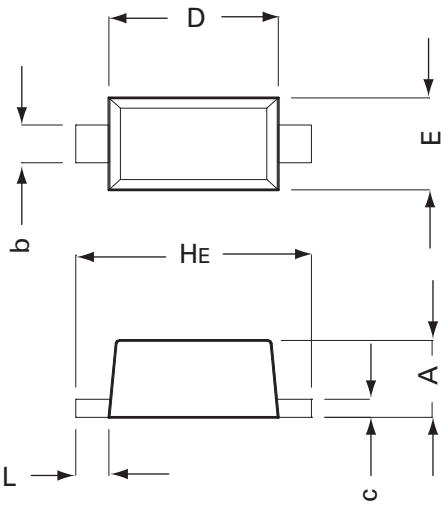

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.46	0.65	0.018	0.026
b	0.23	0.35	0.009	0.014
c	0.08	0.13	0.003	0.005
D	0.90	1.10	0.035	0.043
E	0.58	0.64	0.023	0.025
HE	1.37	1.47	0.054	0.058
L	0.15	0.25	0.006	0.010

Recommened Mounting Pad Layout Unit:mm

