

Desicription

◆ This low-power TVS （Transient Voltage Suppressor)is mainly used for signal and power supply to protect the back-stage circuit from ESD(Electrostatic Discharge) and EFT(Electrical Fast Transients) and improve the reliability of the product, because its extremely small package is suitable for various portable devices and mobile electronic devices.



SOD-323

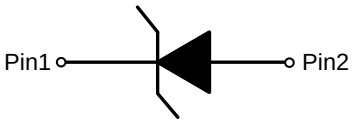

Circuit diagram

Features

◆ IEC61000-4-2(ESD):±30KV Max Air
±30KV Max Contact
◆ IEC61000-4-4(EFT):40A(5/50ns)
◆ IEC61000-4-5(Surge):35A（8/20us）
◆ Line capacitance:210 pF@1MHz
◆ Very low reverse current:I_R<0.2uA(typical)
◆ Halogen free ,Lead free and RoHs

Application

◆ Cellular phones
◆ Portable devices
◆ Digital cameras
◆ Player
◆ Smart home
◆ Robot

Order information

Model	Marking	Package	shipping
ESD7A211TR	**8H**	**SOD-323**	**3000/Tape&Reel**


Electrical characteristic(T=25℃ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	TYP.	Max.	Units
Reverse stand-off voltage	V_{RWM}				7.0	V
Reverse leakage current	I_R	V_{RWM}=7V			0.2	uA
Reveres breakdown voltage	V_{BR}	I_T=1mA	7.5			V
Clamping voltage	V_C	I_{PP}=1A(8/20us)			11.0	V
		I_{PP}=35A (8/20us)			23.0	V
Junction capacitance	C_J	V_R=0V f=1MHz		210.0		pF

Electrical characteristic(T=25℃, unless otherwise specified)

Electrical performance curve


Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
I_T	Test Current
V_{BR}	Breakdown Voltage @ I_T
I_F	Forward Current
V_F	Forward Voltage @ I_F

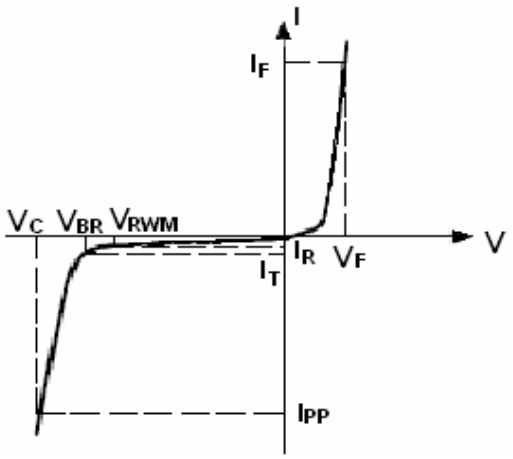


Maximum Rating

Rating	symbol	value	Units
Peak Pulse Current(tp=8/20us)	I_{PP}	35.0	A
ESD per IEC61000-4-2(Contact)	V_{ESD}	±30	KV
ESD per IEC61000-4-2(Air)		±30	
Operating Temperature	T_J	-50~125	℃
Storage Temperature	T_{STG}	-55~150	℃


Typical characteristic

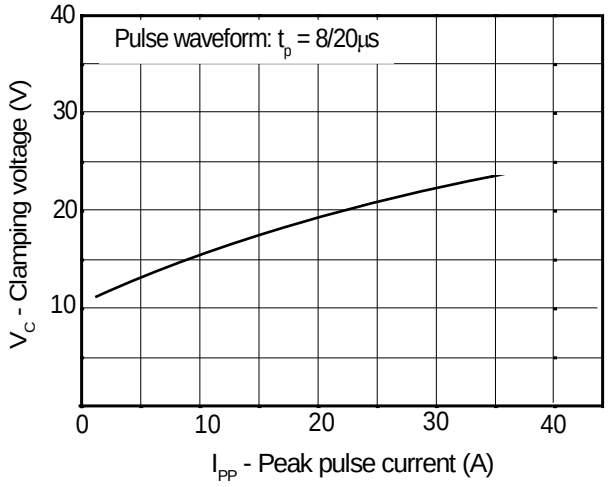


Clamping voltage vs. Peak pulse current

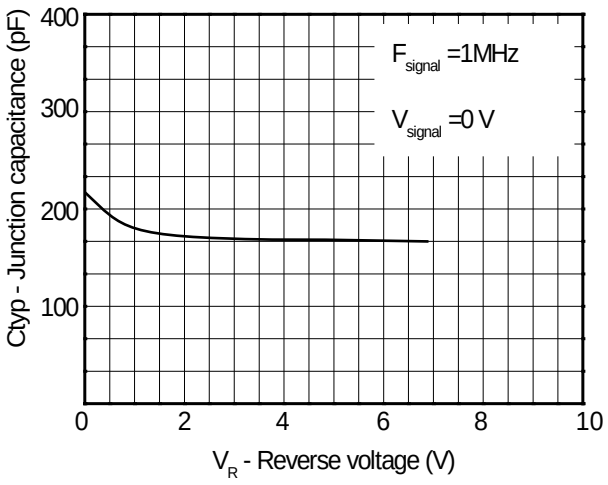


Capacitance vs. Reveres voltage

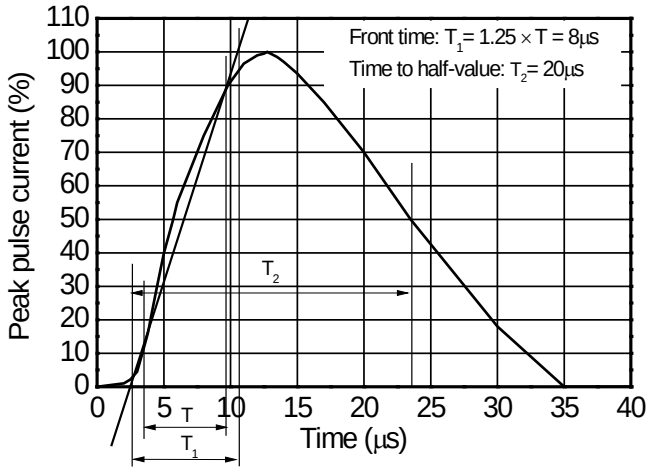


8/20μs waveform per IEC61000-4-5

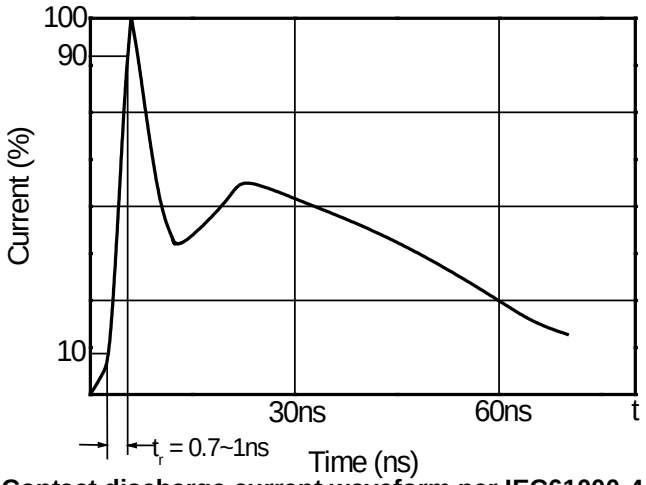

Contact discharge current waveform per IEC61000-4-2

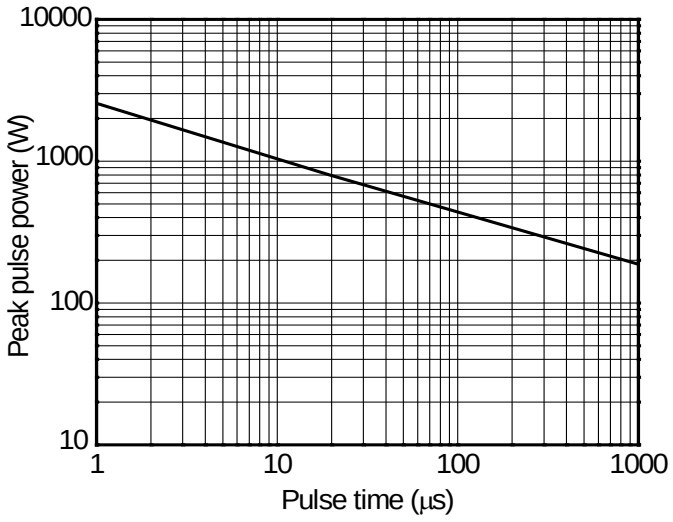


Non-repetitive peak pulse power vs. Pulse time

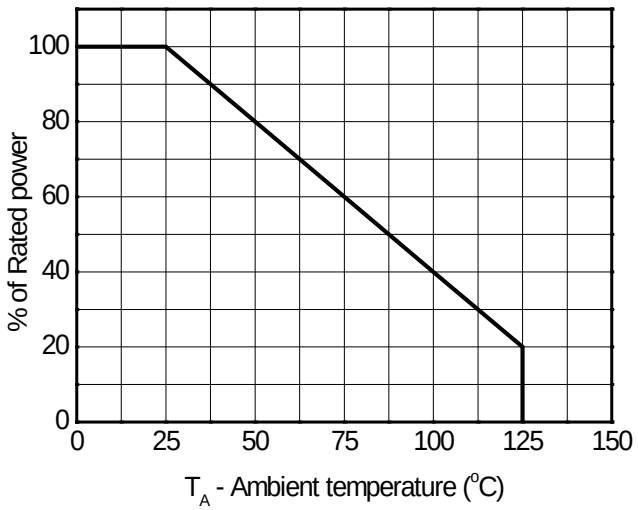


Power derating vs. Ambient temperature

Package outline dimensions **SOD-323**

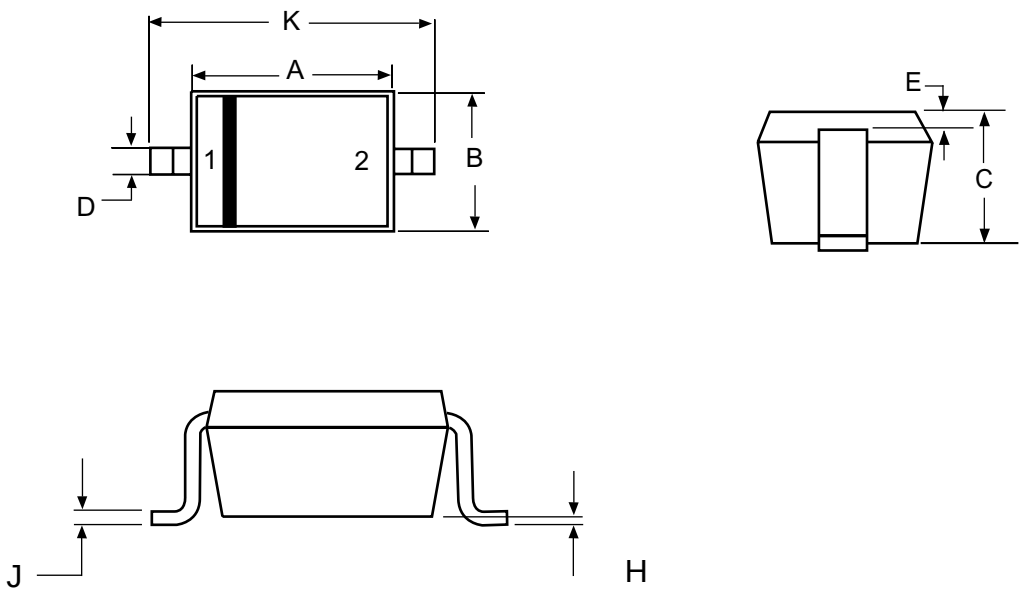

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.80	0.063	0.071
B	1.15	1.35	0.045	0.053
C	0.80	1.00	0.031	0.039
D	0.25	0.40	0.010	0.016
E	0.15 REF		0.006 REF	
H	0.00	0.10	0.000	0.004
J	0.089	0.177	0.0035	0.0070
K	2.30	2.70	0.091	0.106

Recommend land pattern (Unit: mm)

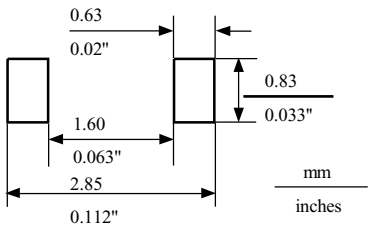

Note: This land pattern is for your reference only. Actual pad layouts may vary depending on application.