




-30V/-65A P-Channel Advanced Power MOSFET

BVDSS	-30	V
ID	-65	A
RDSON@VGS=-10V	5.8	mΩ
RDSON@VGS=-4.5V	7.8	mΩ

PDFN5X6-8L

Features

- Improved dv/dt Capability, High Ruggedness.
- Maximum Junction Temperature Range (150°C)

Applications

- DC Fan
- Brushless motor
- Optimized for Power Management Applications for Portable Products, such as H-bridge, Inverters Car Charger and Others

Order Information

Product	Package	Marking	Reel
M03P65J	PDFN5X6-8L	PTN65P03	5000PCS

Absolute Maximum Ratings

Symbol	Parameter		Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)				
V _{(BR)DSS}	Drain-Source Breakdown Voltage		-30	V
V _{GS}	Gate-Source Voltage		±20	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	°C
I _S	Diode Continuous Forward Current	TC =25°C	-65	A
Mounted on Large Heat Sink				
E _{AS}	Single Pulse Avalanche Energy (Note1)		241	mJ
I _{DM}	Pulse Drain Current Tested (Silicon Limit) (Note2)	TC =25°C	-240	A
I _D	Continuous Drain current	TC =25°C	-65	A
P _D	Maximum Power Dissipation	TC =25°C	59	W
R _{θJC}	Thermal Resistance Junction-to-Case (Note3)		2.1	°C/W

-30V/-65A P-Channel Advanced Power MOSFET

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ T _J = 25°C (unless otherwise stated)						
V _{(BR)DSS}	Drain- Source Breakdown Voltage	VGS=0V ID=-250μA	-30	--	--	V
I _{DSS}	Zero Gate Voltage Drain current	VDS=-30V,VGS=0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	VGS=±20V,VDS=0V	--	--	±100	nA
V _{GS(TH)}	Gate Threshold Voltage	VDS=VGS,ID=-250μA	-1	--	-2.1	V
R _{DS(ON)}	Drain-Source On-State Resistance (Note4)	VGS=-10V, ID=-30A	--	5.8	7	mΩ
		VGS=-4.5V, ID=-20A	--	7.8	10	mΩ
Dynamic Electrical Characteristics @ T _J = 25°C (unless otherwise stated) (Note5)						
C _{iss}	Input Capacitance	VDS= -15V, VGS=0V, F=1MHz	--	3884	--	pF
C _{oss}	Output Capacitance		--	512	--	pF
C _{rss}	Reverse Transfer Capacitance		--	20	--	pF
Q _g	Total Gate Charge	VDS= -15V, ID= -10A, VGS= -10V	--	64	--	nC
Q _{gs}	Gate-Source Charge		--	16	--	nC
Q _{gd}	Gate-Drain Charge		--	19	--	nC
Switching Characteristics (Note5)						
t _{d(on)}	Turn-on Delay Time	VDD=-15V, ID=-10A, RG=3Ω, VGS=-10V	--	20	--	nS
t _r	Turn-on Rise Time		--	15	--	nS
t _{d(off)}	Turn-off Delay Time		--	59	--	nS
t _f	Turn-off Fall Time		--	28	--	nS
Source- Drain Diode Characteristics@ T _J = 25°C (unless otherwise stated)						
V _{SD}	Forward on voltage	IS=-30A,VGS=0V	--	--	-1.2	V

Note:

- Limited by TJmax, starting TJ = 25° C, RG = 25Ω, VD = -15V, VGS = -10V. Part not recommended for use above this value.
- Repetitive Rating: Pulse width limited by maximum junction temperature.
- Surface Mounted on FR4 Board, t ≤ 10 sec.
- Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.

-30V/-65A P-Channel Advanced Power MOSFET

Typical Characteristics

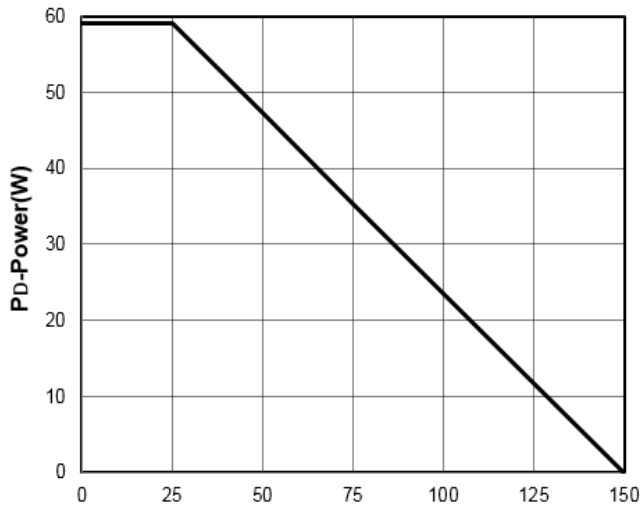


Figure1: T_J Junction Temperature (°C)

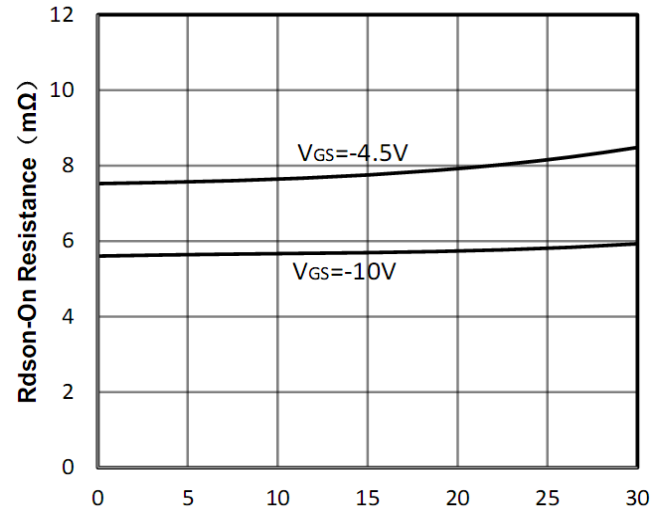


Figure2: -I_D Drain Current (A)

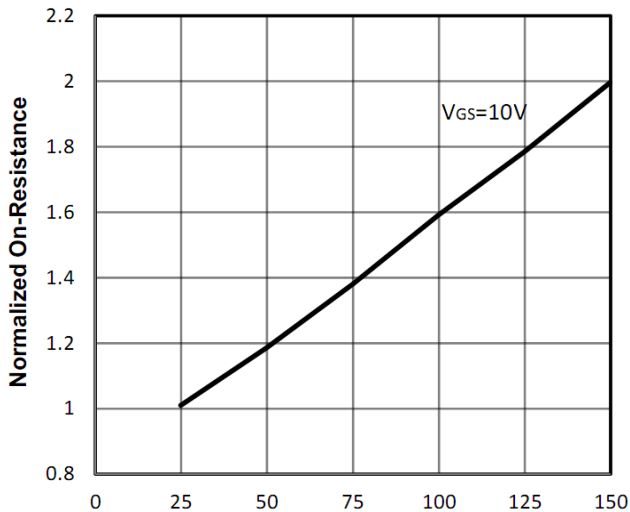


Figure3: T_J Junction Temperature (°C)

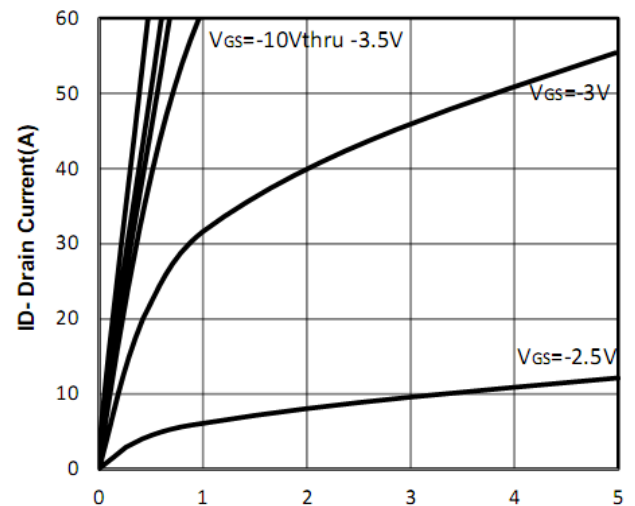


Figure4: -V_{DS} Drain Source Voltage (V)

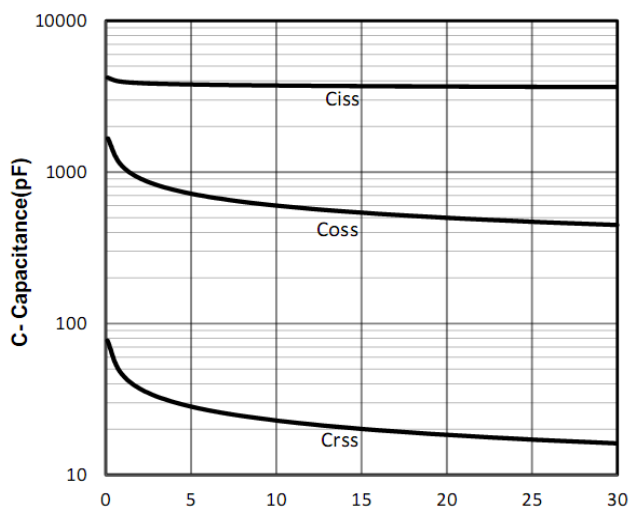


Figure5: -V_{DS} Drain-Source Voltage (V)

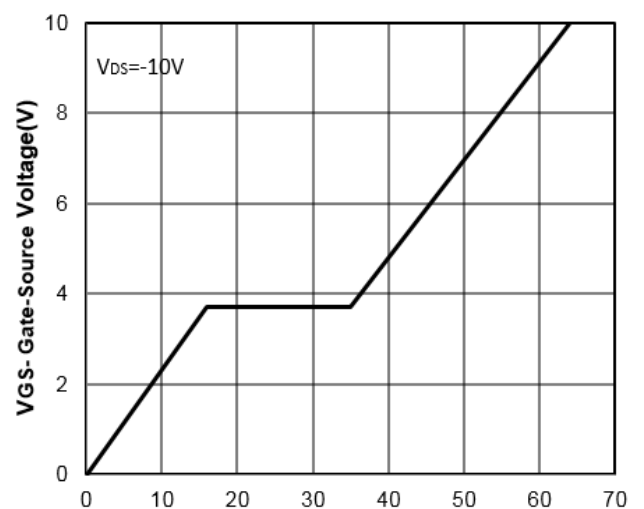


Figure6: Q_g Gate Charge (nC)

-30V/-65A P-Channel Advanced Power MOSFET

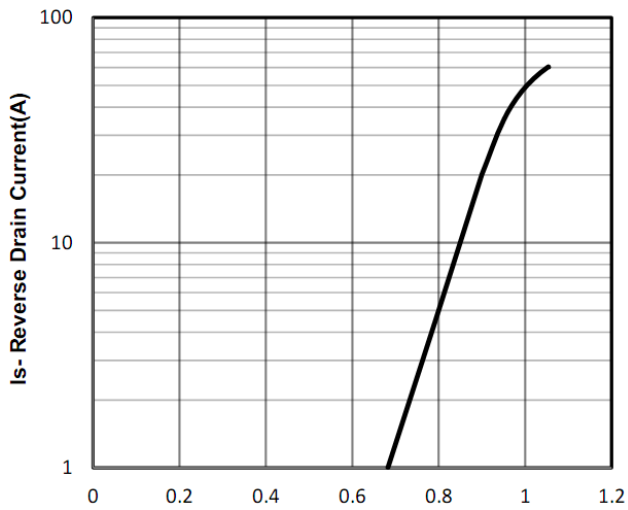


Figure7: -Vsd Source-Drain Voltage (V)

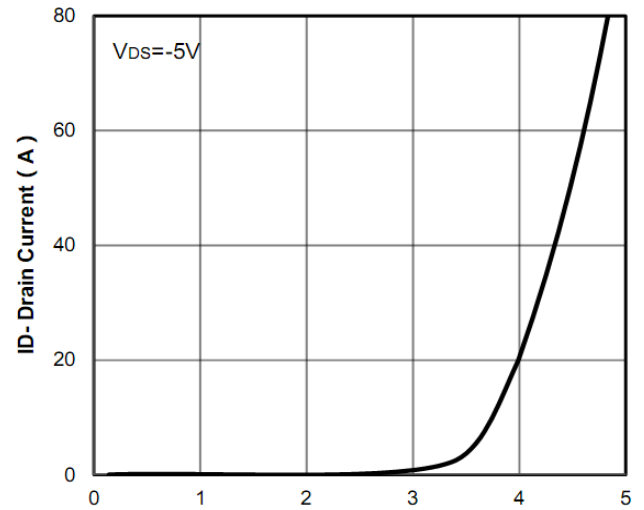


Figure8: -Vgs Gate-Source Voltage (V)

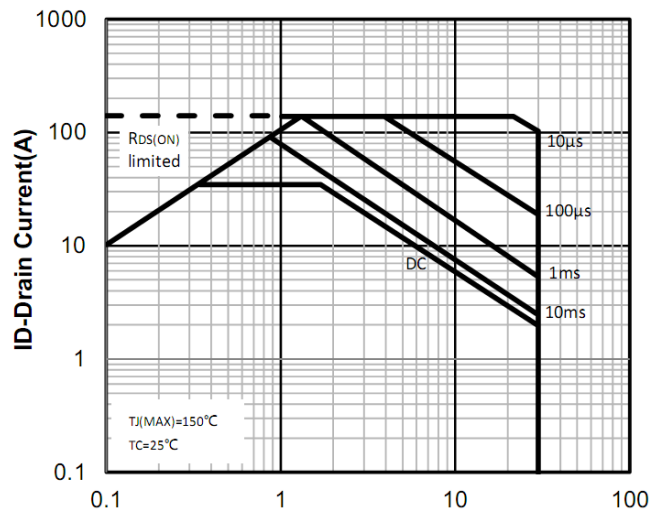


Figure9: -Vds Drain Source Voltage (V)

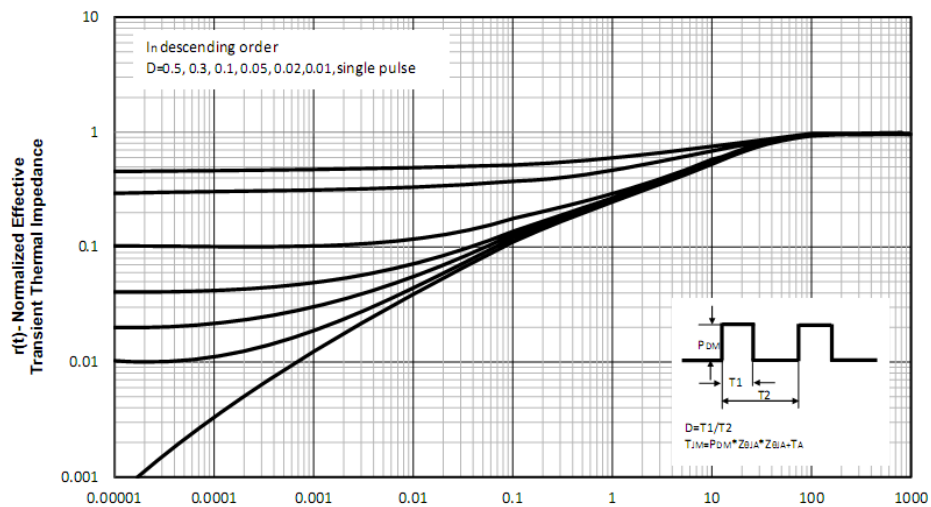


Figure10: Square Wave Pulse Duration (sec)

-30V/-65A P-Channel Advanced Power MOSFET

Test Circuit and Waveform:

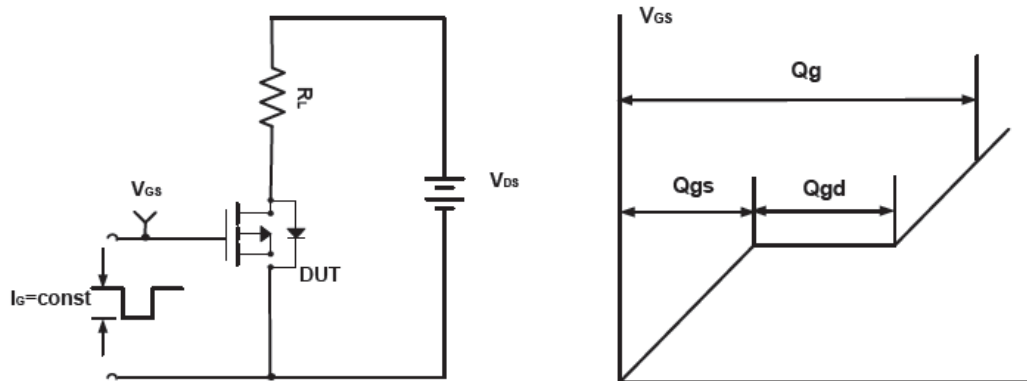


Figure A Gate Charge Test Circuit & Waveforms

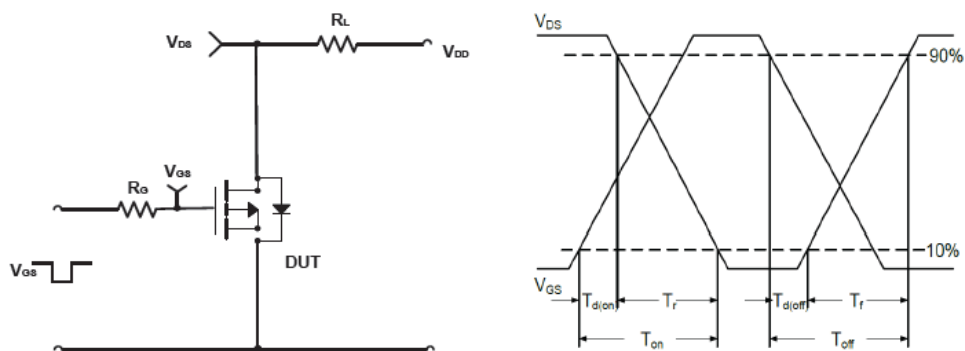


Figure B Switching Test Circuit & Waveforms


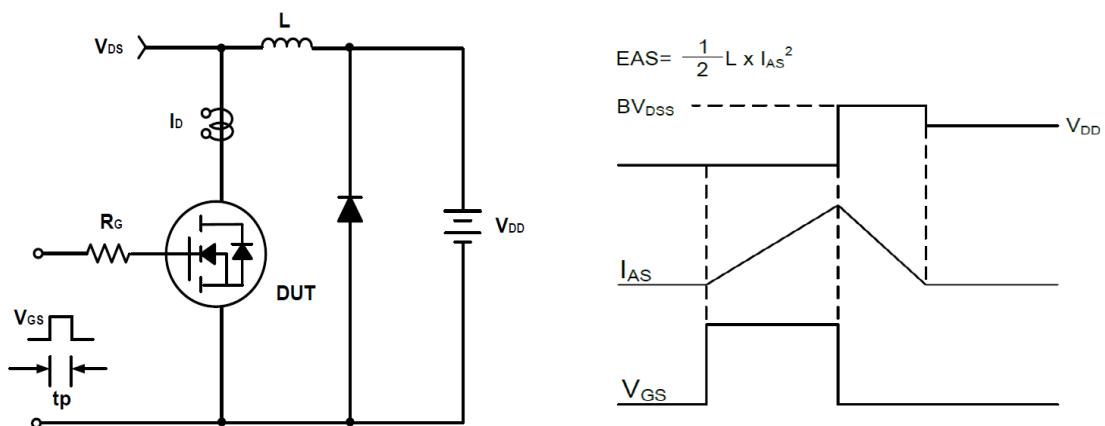


Figure C Unclamped Inductive Switching Circuit & Waveforms

-30V/-65A P-Channel Advanced Power MOSFET

PDFN5X6-8L Package Outline Dimensions (Units: mm)

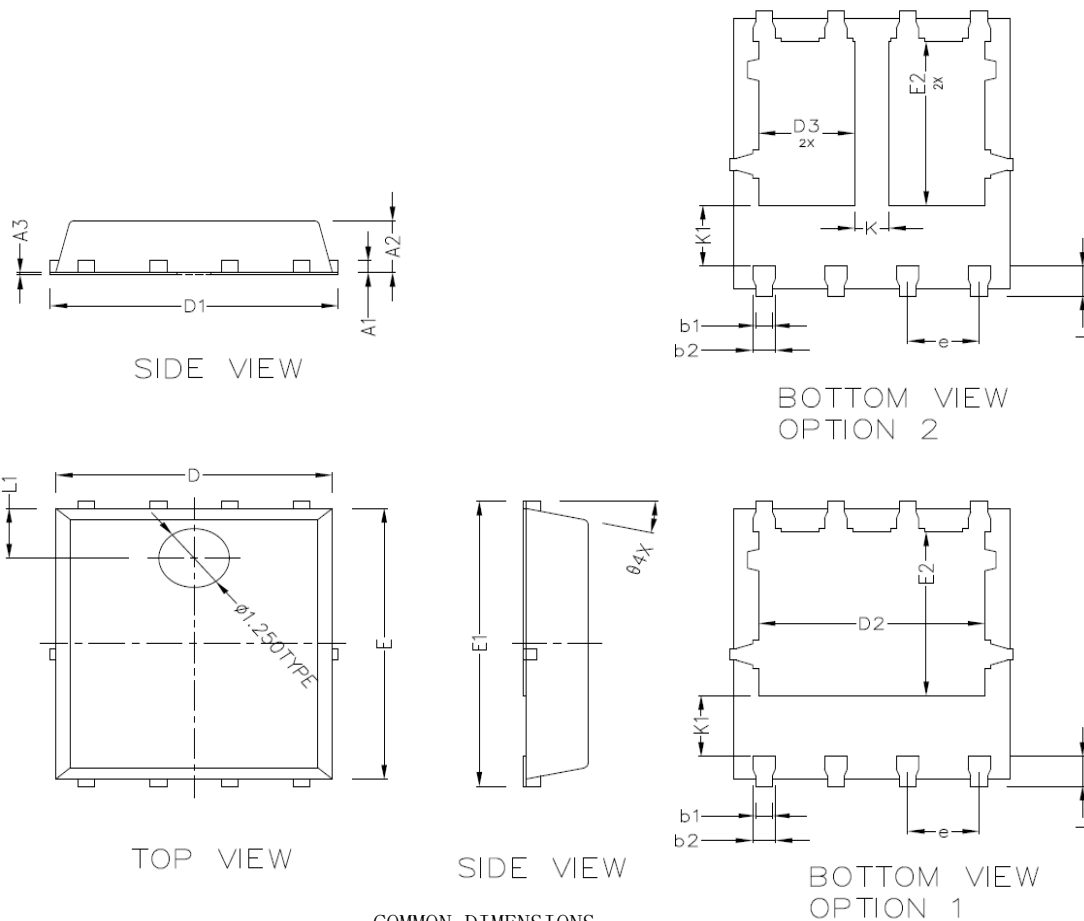

COMMON DIMENSIONS
(UNITS OF MEASURE IS mm)

	MIN	NORMAL	MAX
A1	0.254 BSC		
A2	1.000	1.100	1.200
A3	0.005	—	0.020
b1	0.250	0.300	0.350
b2	0.350	0.400	0.450
D	4.800	4.900	5.000
D1	5.000	5.100	5.200
D2	3.910	4.010	4.110
D3	1.605	1.705	1.805
E	5.650	5.750	5.850
E1	5.950	6.050	6.150
E2	3.375	3.475	3.575
e	1.270 TYPE		
L	0.530	0.630	0.730
L1	1.00REF		
θ	13° TYPE		
K	0.600 REF		
K1	1.235 REF		