

1-Line, Uni-directional, Transient Voltage Suppressors

Descriptions


The ESD12D101TR is a Uni-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD12D101TR may be used to provide ESD protection up to $\pm 30\text{KV}$ Air, $\pm 30\text{KV}$ contact compliance to IEC61000-4-2, and withstand peak pulse current up to 50 A (8/20 μs) according to IEC61000-4-5.

The ESD12D101TR is available in SOD-882 package. Standard products are Pb-free and Halogen-free.



SOD882

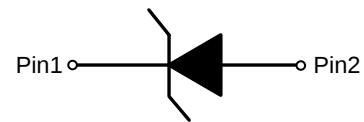

Circuit diagram

Features

- Stand-off voltage: +12 V Max
- Transient protection for each line according to
IEC61000-4-2 (ESD): $\pm 30\text{KV}$ Air, $\pm 30\text{KV}$ contact
IEC61000-4-4(EFT): 60 A (5/50 ns)
IEC61000-4-5 (Surge): 50 A (8/20 μs)
- Solid-state silicon technology
- Low leakage current

Order information

Device	Marking	Package	Shipping
ESD12D101TR	12	SOD-882	10000/Tape&Reel

Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- CAR/MID DVD/MP3/MP4/PMP Players

Absolute maximum ratings


Parameter	Symbol	Rating	Unit
Peak pulse current ($t_p = 8/20\mu s$)	I_{PP}	50	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	kV
ESD according to IEC61000-4-2 contact discharge		± 30	
Operation junction temperature	T_J	-50~125	$^{\circ}C$
Lead temperature	T_L	260	$^{\circ}C$
Storage temperature	T_{STG}	-65~150	$^{\circ}C$

Electrical characteristics ($T_A=25^{\circ}C$, unless otherwise noted)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V_{RWM}				+12.0	V
Reverse leakage current	I_R	$V_{RWM} = 12V$			0.5	μA
Reveres breakdown voltage	V_{BR12}	$I_T=1mA$	13.5	14.0		V
Clamping voltage	V_C pin1 to pin2	$I_{pp}=1A$ $t_p=8/20\mu s$		15.5	16.0	V
		$I_{pp}=50 A$ $t_p=8/20\mu s$		30.0	32.0	V
Junction capacitance	C_J	$V_R = 0V$, $f = 1MHz$		100	120	pF

Electrical performance curve


Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
I_F	Forward Current
V_F	Forward Voltage @ I_F

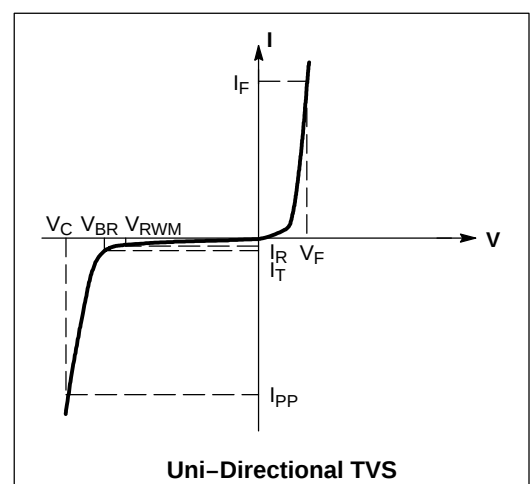


Typical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

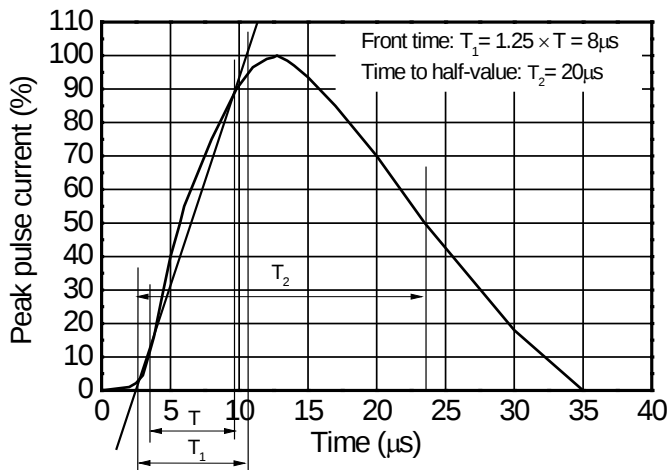


8/20μs waveform per IEC61000-4-5

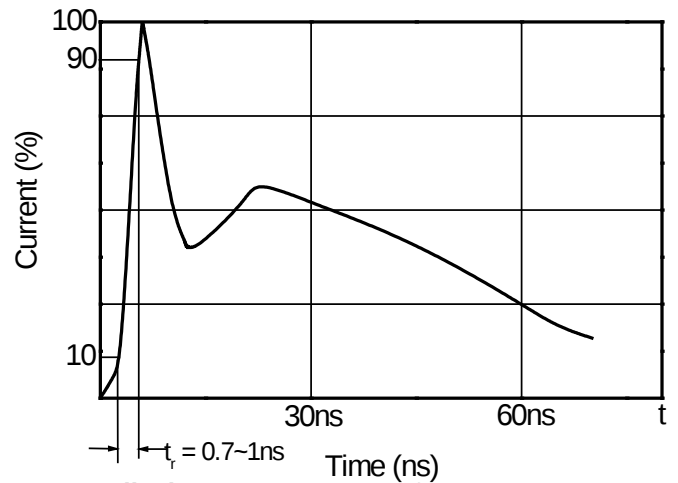


Contact discharge current waveform per IEC61000-4-2

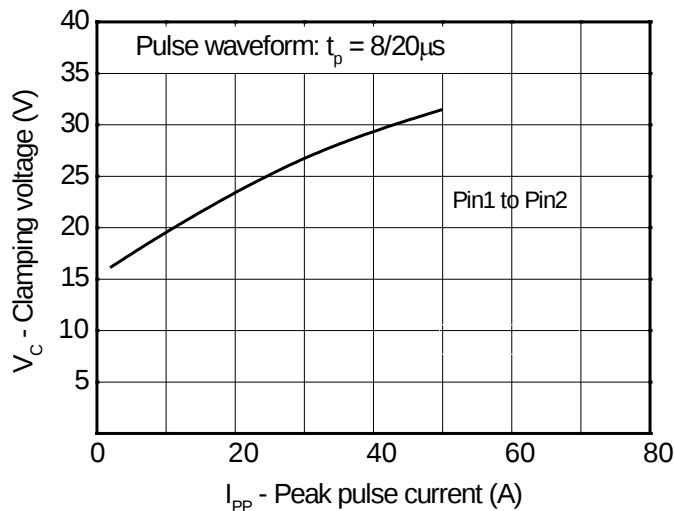


Clamping voltage vs. Peak pulse current

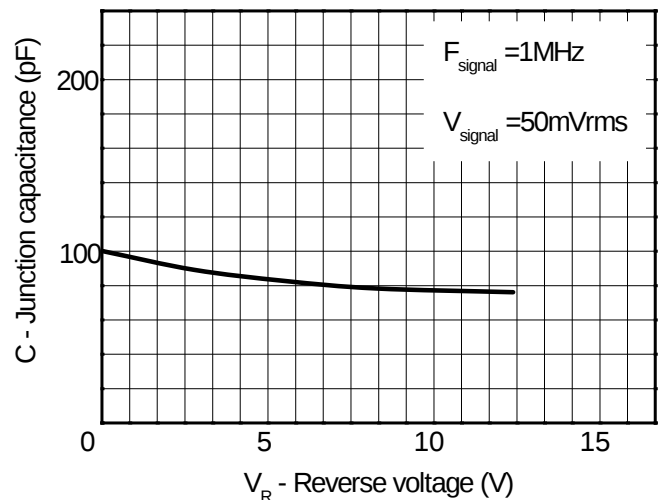

Capacitance vs. Reverses voltage


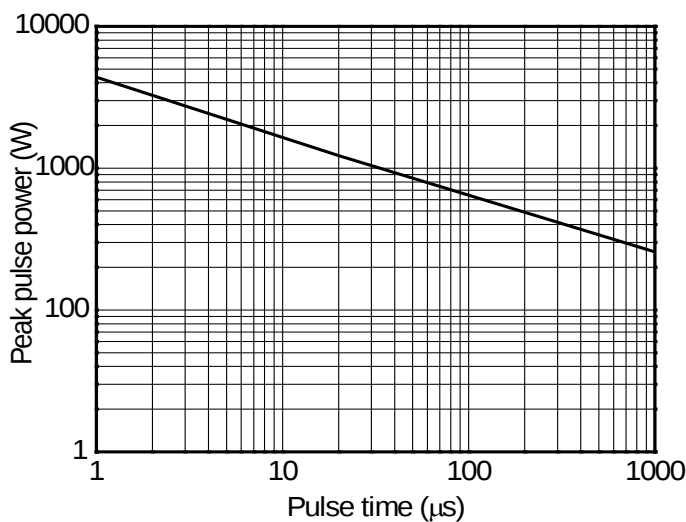


Non-repetitive peak pulse power vs. Pulse time

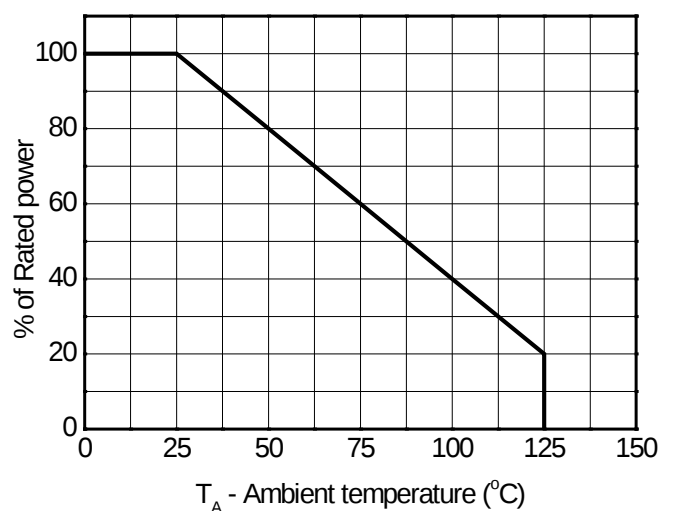


Power derating vs. Ambient temperature

ESD clamping test setup and waveforms

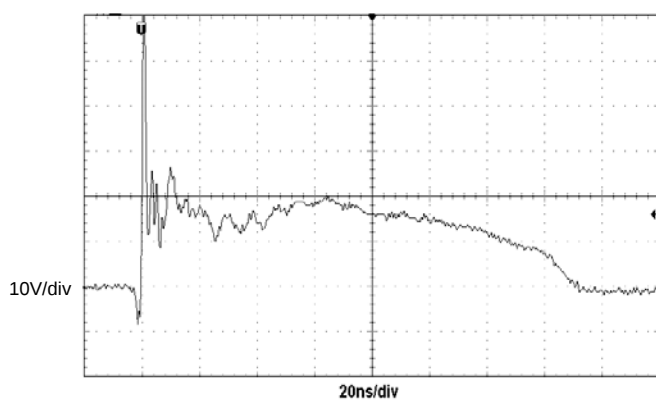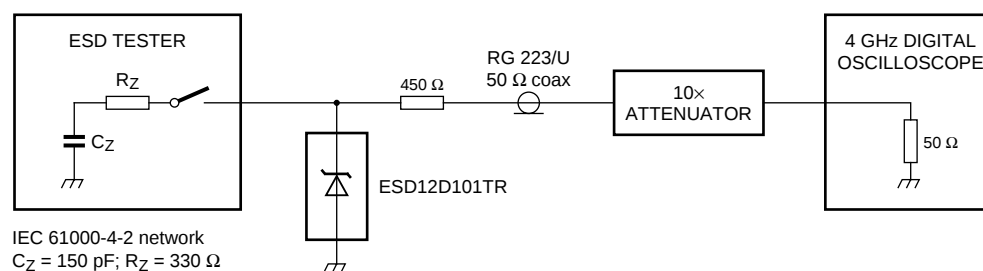


ESD clamping
(+8kV contact discharge per IEC61000-4-2)

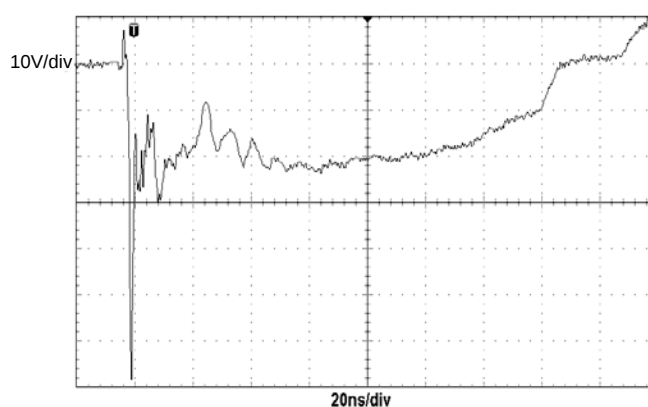

ESD clamping
(-8kV contact discharge per IEC61000-4-2)

Package outline dimensions

SOD882

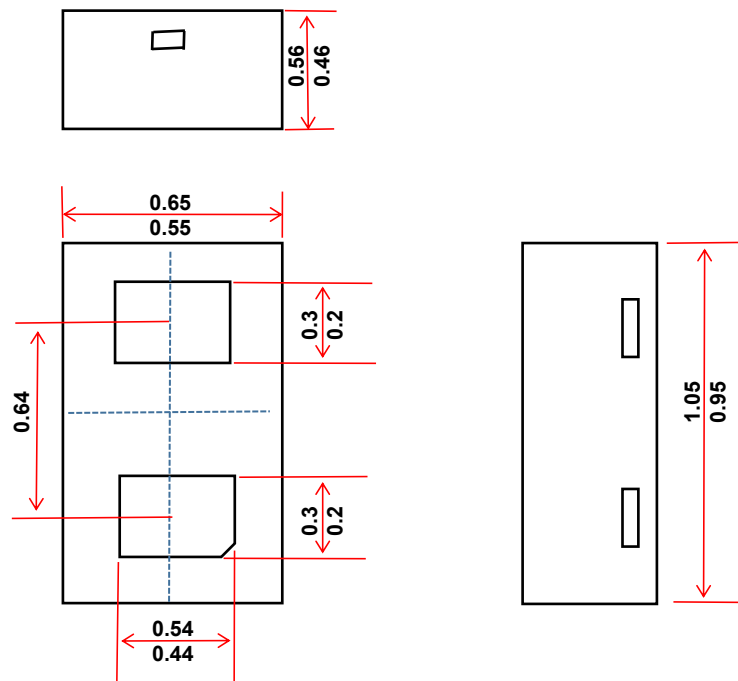

Recommended Mounting Pad Layout Unit:mm

