

Desicription


- ◆ This low-power TVS (Transient Voltage Suppressor) is mainly used for signal and power supply to protect the back-stage circuit from ESD(Electrostatic Discharge) and EFT(Electrical Fast Transients) and improve the reliability of the product, because its extremely small package is suitable for various portable devices and mobile electronic devices.



SOD-323

Features

- ◆ IEC61000-4-2(ESD): $\pm 30\text{KV}$ Max Air
 $\pm 30\text{KV}$ Max Contact
- ◆ IEC61000-4-4(EFT): $40\text{A}(5/50\text{ns})$
- ◆ IEC61000-4-5(Surge): $100\text{A}(8/20\mu\text{s})$
- ◆ Line capacitance: $500\text{pF}@1\text{MHz}$
- ◆ Very low reverse current: $I_R < 0.2\mu\text{A}(\text{typical})$
- ◆ Halogen free ,Lead free and RoHs



Circuit Diagram

Application

- ◆ Cellular phones
- ◆ Portable devices
- ◆ Digital cameras
- ◆ Player
- ◆ Smart home
- ◆ Robot

Order information


Model	Marking	Package	shipping
ESD7A701TR	G	SOD-323	3000/Tape&Reel

Electrical characteristic(T=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min.	TYP.	Max.	Units
Reverse stand-off voltage	V_{RWM}				7.0	V
Reverse leakage current	I_R (Pin1 to Pin2)	$V_{RWM} = 7V$			0.2	uA
Reveres breakdown voltage	V_{BR} (Pin1 to Pin2)	$I_T = 1mA$	7.5		9.5	V
Clamping voltage	V_C (Pin1 to Pin2)	$I_{PP} = 1A(8/20us)$			9.0	V
		$I_{PP} = 100A(8/20us)$			22.0	V
Junction capacitance	C_J	$V_R = 0V$ $f = 1MHz$		500.0		pF

Electrical characteristic(T=25°C, unless otherwise specified)
Electrical performance curve



Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance
I_F	Forward Current
V_F	Forward Voltage @ I_F



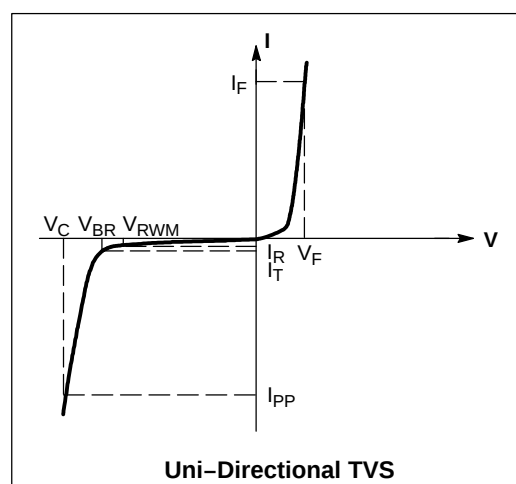


Maximum Rating


Rating	symbol	value	Units
Peak Pulse Current($t_p=8/20\mu s$)	I_{pp}	100.0	A
ESD per IEC61000-4-2(Contact)	V_{ESD}	± 30	KV
ESD per IEC61000-4-2(Air)		± 30	
Operating Temperature	T_J	-55~150	$^{\circ}C$
Storage Temperature	T_{STG}	-55~150	$^{\circ}C$

Typical characteristic

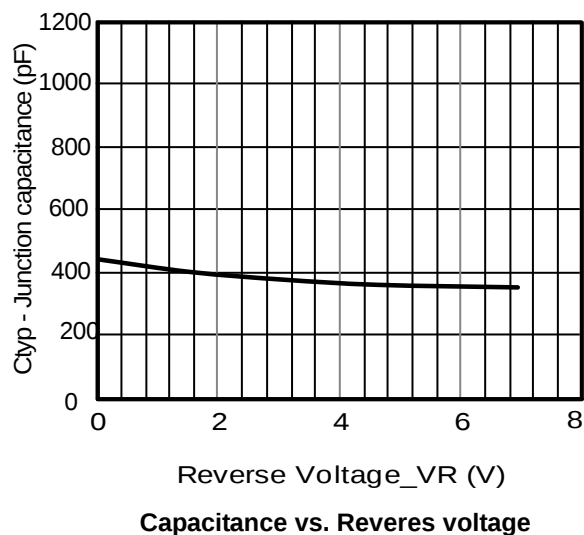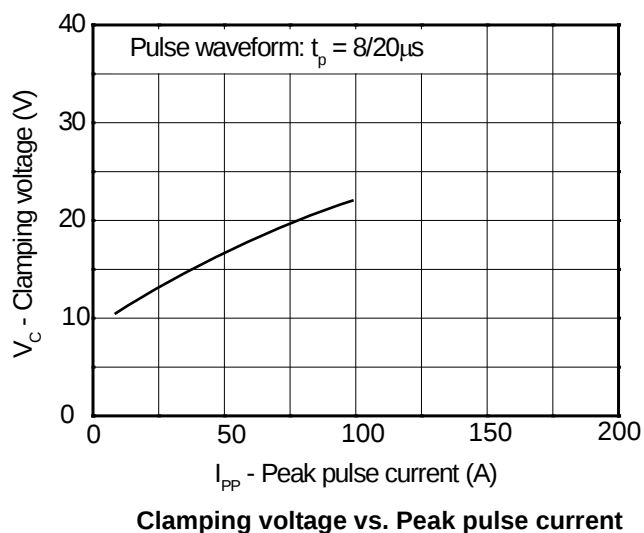


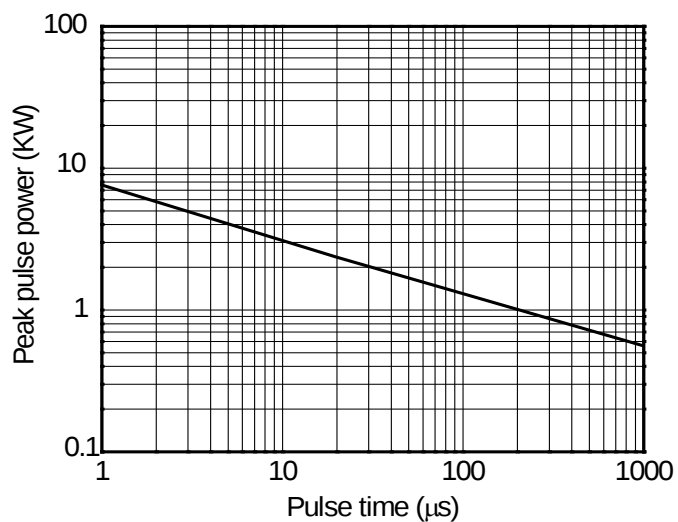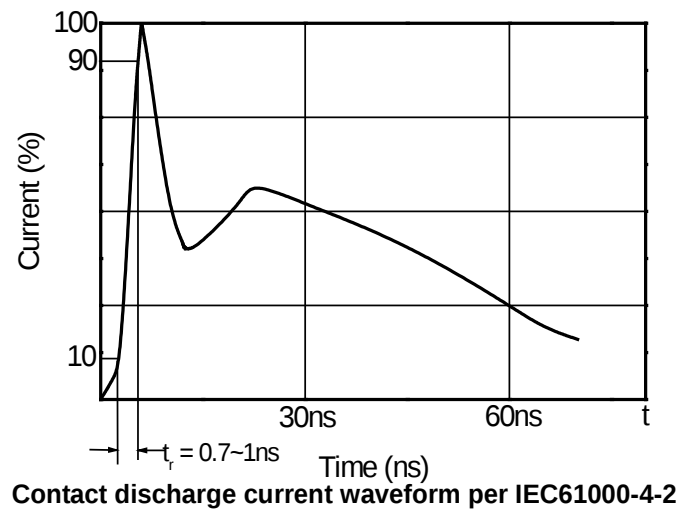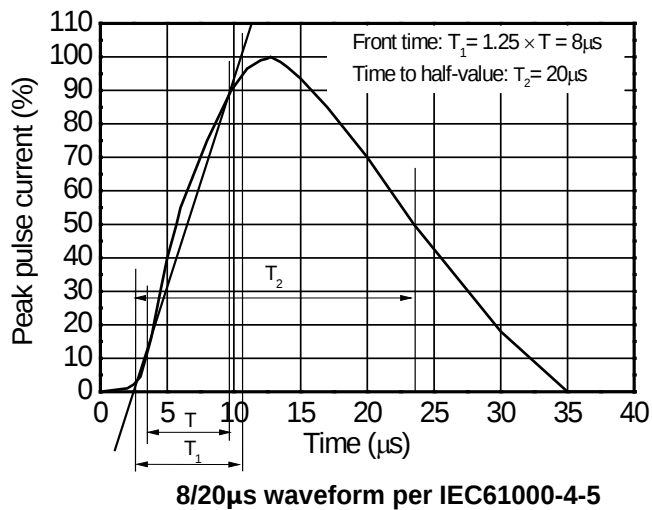


Non-repetitive peak pulse power vs. Pulse time

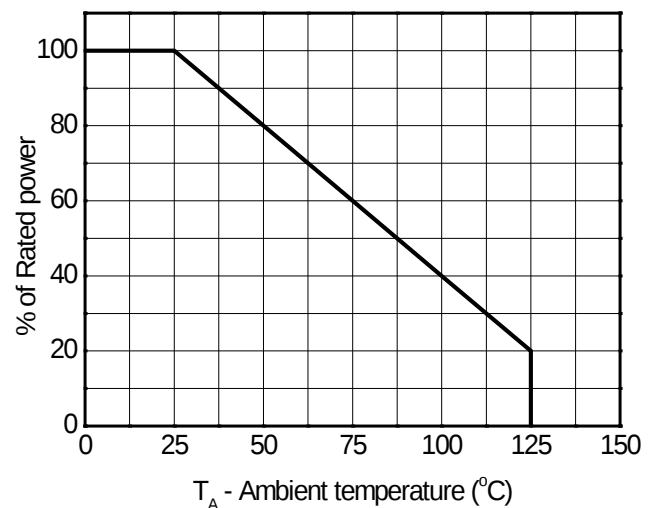

Power derating vs. Ambient temperature

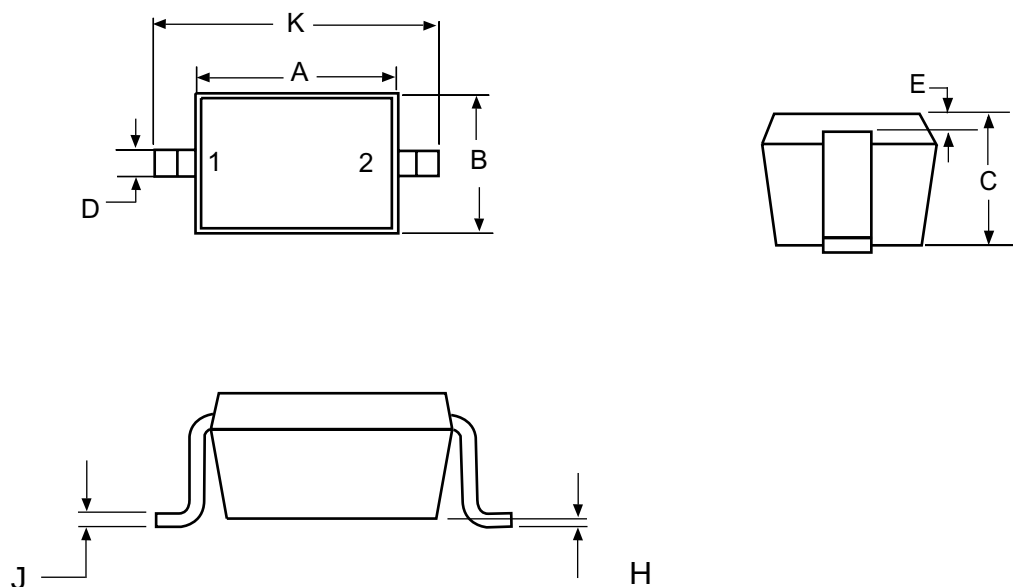Package outline dimensions
SOD-323


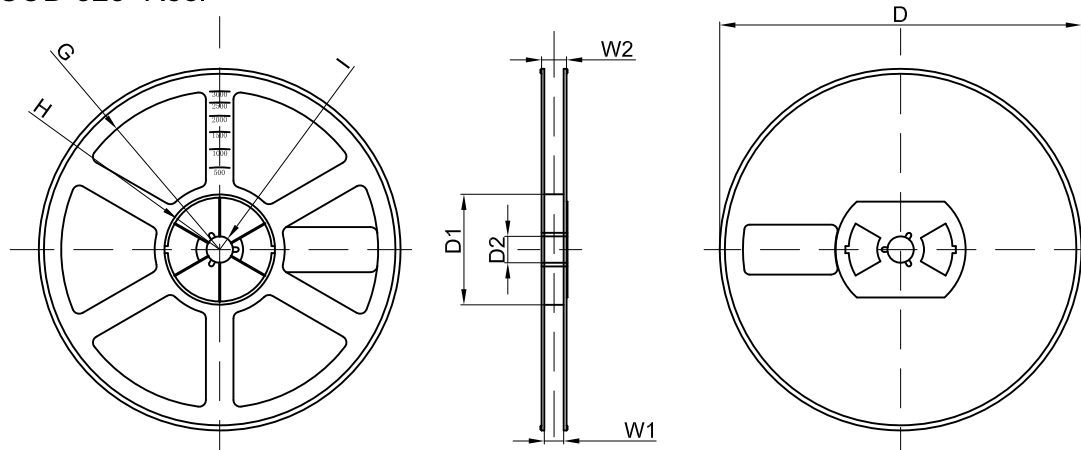
Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.80	0.063	0.071
B	1.15	1.35	0.045	0.053
C	0.80	1.00	0.031	0.039
D	0.25	0.40	0.010	0.016
E	0.15 REF		0.006 REF	
H	0.00	0.10	0.000	0.004
J	0.089	0.177	0.0035	0.0070
K	2.30	2.70	0.091	0.106

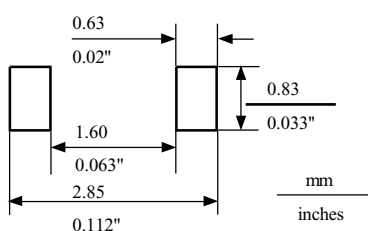Recommend land pattern (Unit: mm)


Note: This land pattern is for your reference only. Actual pad layouts may vary depending on application.


Tape&Reel information

SOD-323 Reel



Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

SOD-323 Embossed Carrier Tape

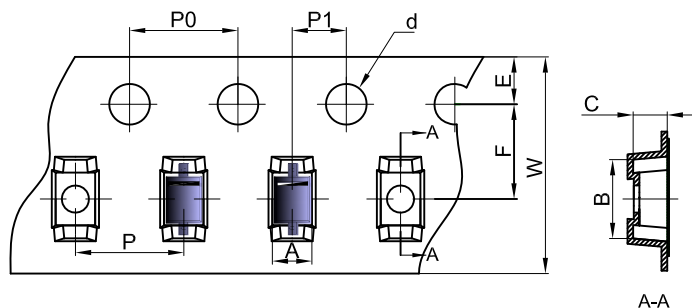

Packaging Description:

SOD-323 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOD-323	1.48	3.3	1.25	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOD-323 Tape Leader and Trailer

